

TYPE: _____
 JOB: _____

SPECIFICATIONS

HOUSING - Heavy gauge extruded aluminum (material of corrosion resistant alloy.) Welded aluminum end plate, no visible seam.

REFLECTOR - Specular, low iridescence, aluminum.

ELECTRICAL - T5, integral electronic ballast, 120/277v (dimmmable available.)

SOCKET - G-5 600v, 120w, with rotor for secure lamp retention.

MOUNTING - Surface, provide proper support.

LABELS - UL, C-UL -Dry Location.


LAMP - T5, 120/277v - by others.

LENS - Supertex acrylic.

FINISH - Powder paint on all surfaces. RAL colors standard, consult factory for custom finishes.

APPLICATIONS

Small profile, surface mounted cove light.

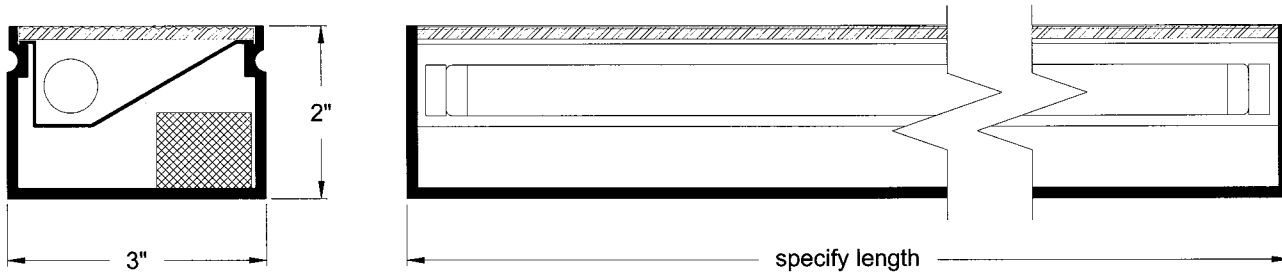

ORDERING INFORMATION

FIXTURE	LAMP	LENGTH	FINISH
#106FL			
Surface mounted cove light	14T5 = 14w 21T5 = 21w 28T5 = 28w 24HOT5 = 24w HO 39HOT5 = 39w HO 54HOT5 = 54w HO	4 = 4' (Quick Ship*) specify exact length	WHT = White BLK = Black XXXX = RAL # CST = Custom (must supply chip)

* 4 - Quick Ship - Only available in white finish



SPECIALTY LIGHTING INDUSTRIES, INC. ©2004

1306 DORIS AVENUE OCEAN, NJ 07712 800.462.7812 732.517.0800 FAX 732.517.0971 www.specialtylightingindustries.com

These specifications subject to change without notice.