

TYPE: _____
 JOB: _____

SPECIFICATIONS

HOUSING - Heavy gauge extruded aluminum
 (material of corrosion resistant alloy.)
 Welded aluminum end plate, no visible seam.

REFLECTOR - Specular, low iridescence, aluminum.

ELECTRICAL - T5, integral electronic ballast,
 120/277v (dimmable available.)

SOCKET - G-5 600v, 120w, with rotor for secure lamp
 retention.

MOUNTING - Surface, provide proper support.

LABELS - UL, C-UL - Dry Location.


LAMP - T5, 120/277v - by others.

LENS - Supertex acrylic.

FINISH - Powder paint on all surfaces.
 RAL colors standard, consult factory for custom
 finishes.

APPLICATIONS

Small profile, surface mounted cove light.

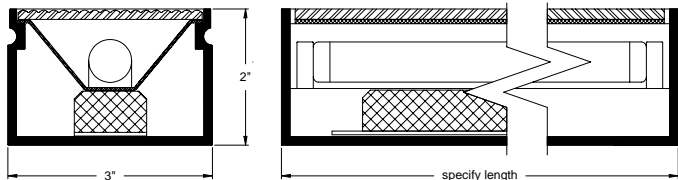

ORDERING INFORMATION

FIXTURE	LAMP	LENGTH	FINISH
#106S-FL			
Surface mounted cove light	14T5 = 14w 21T5 = 21w 28T5 = 28w 24HOT5 = 24w HO 39HOT5 = 39w HO 54HOT5 = 54w HO	specify exact length	WHT = White BLK = Black XXXX = RAL # CST = Custom (must supply chip)



SPECIALTY LIGHTING
 INDUSTRIES, INC.