

TYPE: _____
 JOB: _____

SPECIFICATIONS

HOUSING - Heavy gauge extruded aluminum (material of corrosion resistant alloy.) Welded aluminum end plate, no visible seam.

REFLECTOR - Semi-specular, low iridescence, aluminum.

ELECTRICAL - T4/DC, 120v.

SOCKET - Double contact bayonet, 125v 500w, 18ga 600v, 200° C silicone wire.

MOUNTING - Surface, provide proper support.

LABELS - UL, C-UL -Dry Location.



LAMP - T4/DC, 20w-40w, 120v, frosted - by others.

LENS - Supertex borosilicate glass. Others available consult factory.

FINISH - Powder paint on all surfaces. RAL colors standard, consult factory for custom finishes.

APPLICATIONS

Small profile, surface mounted cove light.

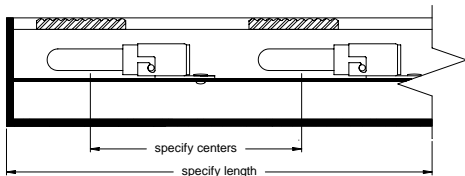

ORDERING INFORMATION

FIXTURE	LAMP	LENGTH	FINISH
#106S			
Surface mounted cove light	20T4/DC = 20w, 120v, DC base 40T4/DC = 40w, 120v, DC base	specify exact length	WHT = White BLK = Black XXXX = RAL # CST = Custom (must supply chip)



SPECIALTY LIGHTING
 INDUSTRIES, INC.