

SPECIFICATIONS

HOUSING - Heavy gauge extruded aluminum (material of corrosion resistant alloy.) Aluminum end plate.

ELECTRICAL - MR-16, integral electronic transformer, thermal protector, standard.

SOCKET - Precision die formed aluminum socket plate. G-4/G-6 with 250°C 600v Teflon coated lead wires.

MOUNTING - Recessed, for plaster ceiling.

APPLICATIONS

Large profile, recessed, intended to graze down walls and other flat surfaces by positioning the trim of the fixture housing near the surface to be illuminated.

TYPE: _____


JOB: _____

LABELS - UL, C-UL -Dry Location.

LAMP - MR-16, 12v (narrow spot recommended) - by others.

LENS - Supertex borosilicate glass. Others available consult factory.

FINISH - Powder paint on all surfaces. RAL colors standard, consult factory for custom finishes.

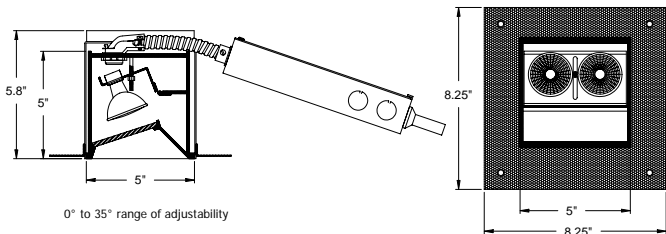

ORDERING INFORMATION

FIXTURE	LAMP	FINISH
#1200-S		
Recessed linear adjustable wall grazing system	20MR-16 = 12v, 20w 35MR-16 = 12v, 35w	WHT = White BLK = Black XXXX = RAL # CST = Custom (must supply chip)



SPECIALTY LIGHTING
INDUSTRIES, INC.

www.specialtylightingindustries.com

1306 DORIS AVENUE, OCEAN, NJ 07712 USA

800.462.7812

732.517.0800

FAX 732.517.0971