

Single lamp, compact fluorescent recessed wall washer with nominal 4"x 9" rectilinear aperture. Suitable for install from below applications.

TYPE: _____

JOB: _____

SPECIFIER: _____

SPECIFICATIONS

HOUSING - Precision die-formed heavy gauge aluminum with perforated flangeless trim and integrated screed edge.

SOCKET - GX24q PBT socket with high temperature, teflon coated lead wires.

MOUNTING - Install from below into sheetrock ceiling.

LENS - Acrylic fresnel lens, hinged for relamping.

ELECTRICAL - Integral electronic, thermally protected ballast. 120v, 277v, (220v 240v, available). External thermoprotector.

TRIM - Flangeless, one piece die-cast aluminum pyramidal shield.


LAMP - Triple tube compact fluorescent supplied by others.

FINISH - Black powder paint housing. Aperture trim available in black and white as standard. Additional colors and RAL palette available. Consult factory for custom finishes.

LABELS - UL, C-UL, Damp location

APPLICATIONS

Wallwashing in low to medium ceiling heights typically found in residential, commercial and retail applications. Suitable for new or existing construction.

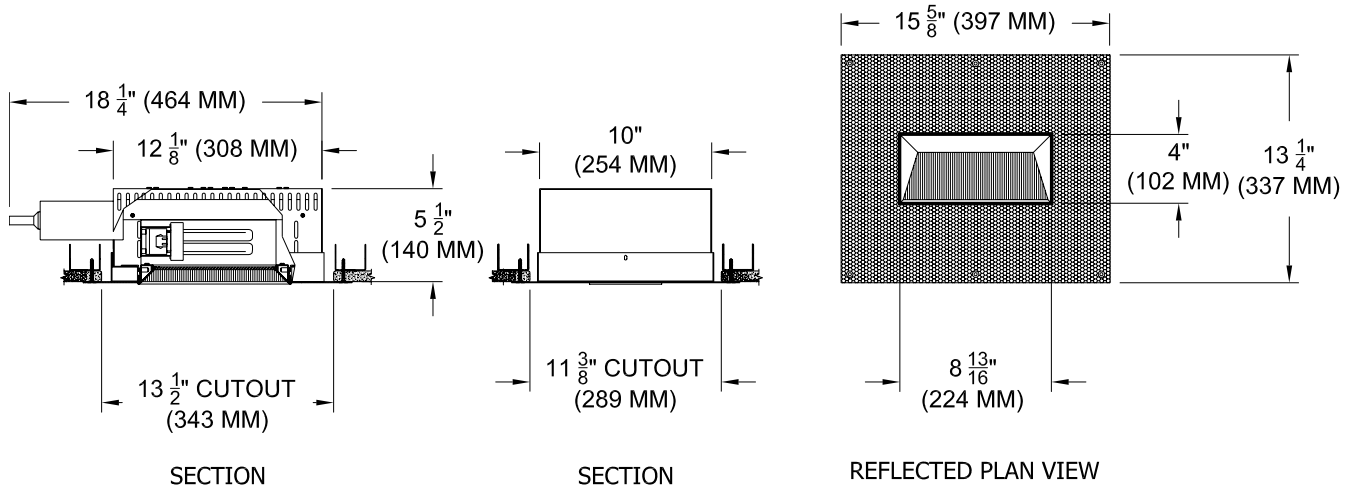

ORDERING INFORMATION

HOUSING	TRIM	VOLTAGE	FINISH	APERTURE LENS
1240-CF__-SPH	ZT			84A
Shallow Plaster Flange Housing 18 = 18 watt 24 = 24 watt 32 = 32 watt	ZT = Flangless trim	120 220 240 277 add DM for dimming	P14 = Matte White BLK = Black PXX = SLI Color XXXX = RAL # CST = Custom	84A = Fresnel Acrylic



SPECIALTY LIGHTING INDUSTRIES, INC.

NOTE: These specifications subject to change without notice.

www.specialtylightingindustries.com

1306 DORIS AVENUE, OCEAN, NJ 07712 USA 800.462.7812 732.517.0800 FAX 732.517.0971 © 10/08