

Single lamp, low-voltage halogen, surface mounted wall washer with nominal 4" square aperture and optional glass diffuser.

TYPE: _____

JOB: _____

SPECIFIER: _____

SPECIFICATIONS

HOUSING - Die-cast aluminum.

MOUNTING - Surface mounted.

ELECTRICAL - For use with remote transformer. Transformer should be sized for the run length and ordered separately.

LAMP - MR-16 NFL, 50w max. supplied by others.

LABELS - CSA-C,US, Damp location.

SOCKET - Precision die-formed aluminum socket plate. G4/G6 ceramic socket with high temperature, teflon coated lead wires.


LENS - Supertex borosilicate spread lens, hinged for relamping. Optional filters available for lampholder.

TRIM - Flanged or flangeless, one piece die-cast aluminum pyramidal shield. ST trim fully sealed and gasketed.

FINISH - Housing and aperture trim available in black and white as standard. Additional colors and RAL palette available. Consult factory for custom finishes.

APPLICATIONS

Wallwashing in low to medium ceiling heights typically found in residential, commercial and retail applications. Suitable for new or existing construction.

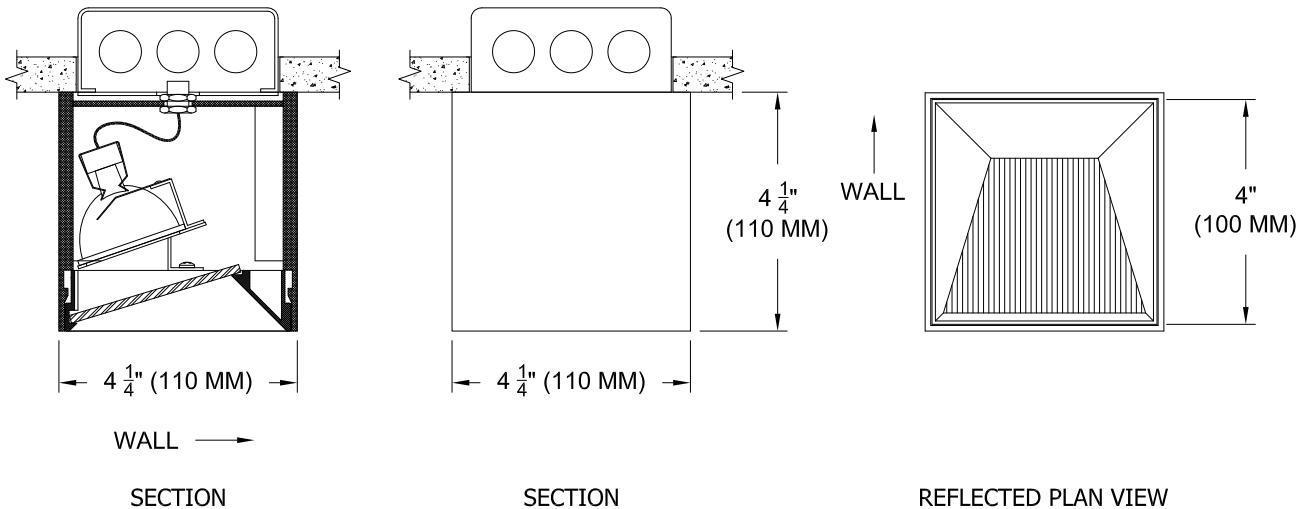

ORDERING INFORMATION

HOUSING	TRIM	TRANSFORMER		LAMP LENS	TRIM FINISH	APERTURE LENS
1240-MR16-SH	ZT	RX	/			82A
Surface Mounted Housing	ZT = Zero Trim	RX = Remote	120 277	98L = UV Filter	P14 = White PXX = SLI Color XXXX = RAL # CST = Custom	82A = Frosted Supertex



SPECIALTY LIGHTING INDUSTRIES, INC.

NOTE: These specifications subject to change without notice.

www.specialtylightingindustries.com

1306 DORIS AVENUE, OCEAN, NJ 07712 USA 800.462.7812 732.517.0800 FAX 732.517.0971 © 06/11