

Single lamp, metal halide, recessed wall washer with nominal 4" square aperture and flangeless trim.

TYPE: _____

JOB: _____

SPECIFIER: _____

SPECIFICATIONS

HOUSING - Precision die-formed heavy gauge aluminum with extruded ceiling collar.

MOUNTING - Recessed in millwork or stone ceiling.

ELECTRICAL - Integral electronic ballast. 120v primary lead, (220v, 240v, 277v available). External thermoprotector.

LAMP - GE MR-16 20w CMH supplied by others.

LABELS - UL, C-UL Damp Location

SOCKET - Precision die-formed aluminum socket plate. GX10 ceramic socket with high temperature, silicone coated lead wires.


LENS - Supertex borosilicate spread lens, hinged for relamping.

TRIM - Flangeless, one piece die-cast aluminum pyramidal shield.

FINISH - Black powder paint housing. Aperture trim available in black white or RAL colors as standard. Consult factory for custom finishes.

APPLICATIONS

Wallwashing in medium ceiling heights typically found in commercial and retail applications. Suitable for new construction.

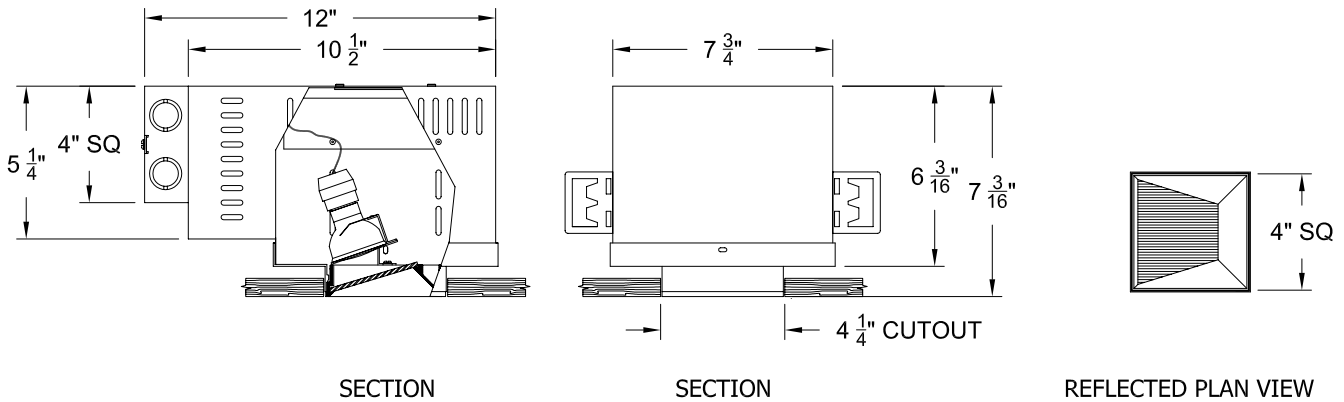

ORDERING INFORMATION

HOUSING	TRIM	VOLTAGE	FINISH	APERTURE LENS
1240-MR16MH-WH	ZT			92A
Wood Housing	ZT = Flangeless trim	120 220 240 277	P14 = Matte White BLK = Black XXXX = RAL # CST = Custom (supply chip)	92A = Supertex



SPECIALTY LIGHTING INDUSTRIES, INC.

NOTE: These specifications subject to change without notice.

www.specialtylightingindustries.com

1306 DORIS AVENUE, OCEAN, NJ 07712 USA 800.462.7812 732.517.0800 FAX 732.517.0971 © 09/07