

Single lamp, solid state light engine, recessed wall washer with nominal 4" conical aperture.

TYPE: _____

JOB: _____

SPECIFIER: _____

SPECIFICATIONS

HOUSING - Precision die-formed heavy gauge aluminum with machined adjustable ceiling collar.

SOCKET - LED module can be replaced in the field.

MOUNTING - Recessed in architectural ceiling.

ELECTRICAL - Integral dimmable electronic driver with internal short circuit protection. 120v-277v primary, compatible with 0-10v dimmers.

LENS - Supertex borosilicate spread lens, hinged for relamping.

TRIM - Flangeless die-cast aluminum conical shield. ST trim fully sealed and gasketed.


LAMP - Xicato LED supplied with fixture. Available in 2700 and 3000K color temperature and 80 or 95 CRI.

FINISH - Black powder paint housing. Aperture trim available in black and white as standard. Solid wood, additional colors and RAL palette available. Consult factory for custom finishes.

LABELS - CSA-C,US, Damp location Wet with ST trim.

APPLICATIONS

Wallwashing in low to medium ceiling heights typically found in residential, commercial and retail applications. Suitable for new construction .

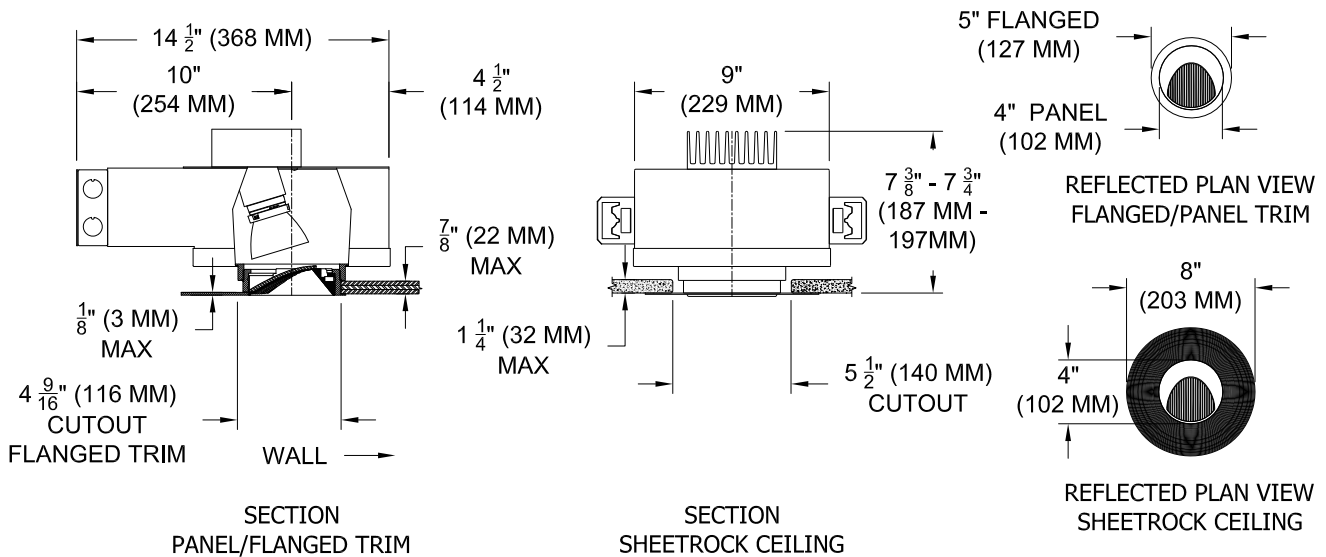

ORDERING INFORMATION

HOUSING	TRIM	DRIVER	FINISH	APERTURE LENS
1250-LEDX__-UH				
Universal Housing 827 = 2700K 80CRI 927 = 2700K 95CRI 830 = 3000K 80CRI 930 = 3000K 95CRI	FT = Flanged Trim PT = Panel Trim ST = Shower Trim ZT = Zero Trim	125 = 120v-277v HE 127 = 120v-277v HO	P14 = White PXX = SLI Color WXX = Wood XXXX = RAL # CST = Custom	82A = Frosted Supertex

[CLICK HERE](http://www.specialtylightingindustries.com) for LED and driver performance information including wattage and lumen output or go to www.specialtylightingindustries.com.



SPECIALTY LIGHTING INDUSTRIES, INC.

NOTE: These specifications subject to change without notice.

www.specialtylightingindustries.com

1306 DORIS AVENUE, OCEAN, NJ 07712 USA 800.462.7812 732.517.0800 FAX 732.517.0971 © 04/12