

Single lamp, solid state light engine recessed floor washer with nominal 3" x 4" aperture.

TYPE: \_\_\_\_\_

JOB: \_\_\_\_\_

SPECIFIER: \_\_\_\_\_

**SPECIFICATIONS**

**HOUSING** - Die-cast aluminum trim. Precision die formed back box with integral screed edge for sheetrock or flange for use in all other materials.

**MOUNTING** - Recessed in architectural wall.

**ELECTRICAL** - Backbox with integral junction box suitable for through wiring.

**LAMP** - 2W LED 3000K supplied with fixture.

**LABELS** - CSA-C,US, Wet location

**SOCKET** - Sealed and potted integral to trim.


**LENS** - Satin acrylic lens. Optional color lenses available.

**TRIM** - Flangeless die-cast aluminum snap-in trapezoidal louvered aperture.

**FINISH** - Anodized housing. Aperture trim available in black and white as standard. Additional colors and RAL palette available. Consult factory for custom finishes.

**APPLICATIONS**

Used for low level lighting of steps and paths and wayfinding in residential, institutional, commercial and theater applications. . May be used indoors or out. Suitable for new or existing construction.

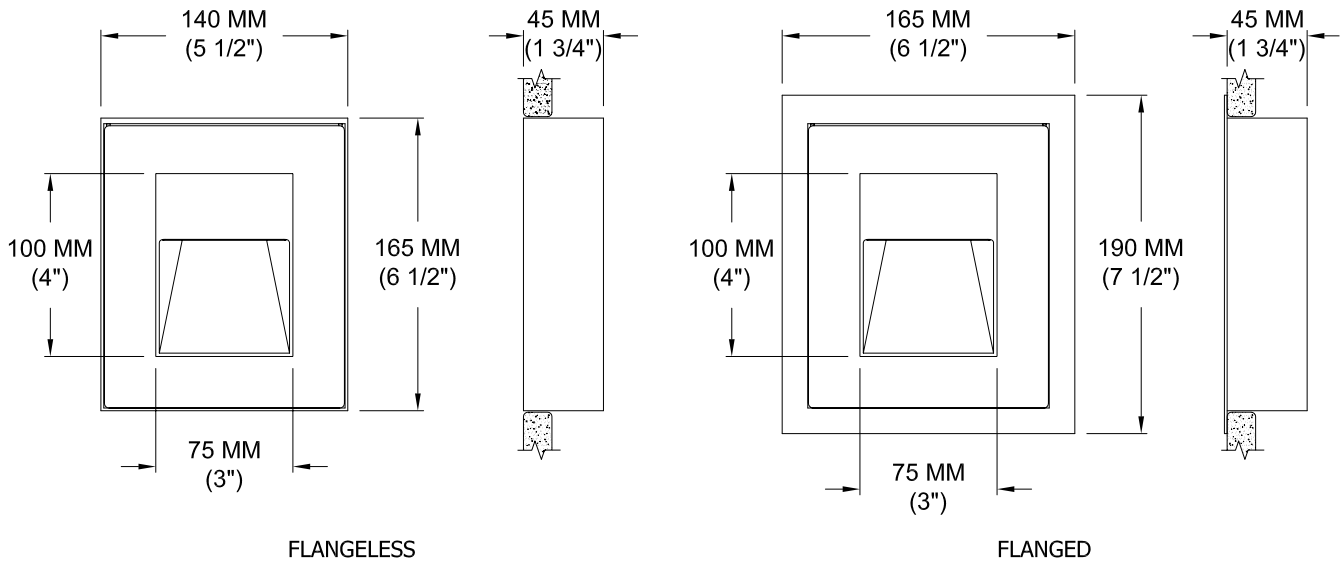

**ORDERING INFORMATION**

MODEL	HOUSING	VOLTAGE	FINISH	APERTURE LENS
<b>2102-LED</b>				
In wall Floor Washer	FH = Flanged Housing PH = Plaster Housing	120 220 240	P14 = White BLK = Black PXX = SLI Color XXXX = RAL # CST = Custom	79A = Veiling Acrylic 62A = Red 63A = Amber



**SPECIALTY LIGHTING INDUSTRIES, INC.**

NOTE: These specifications subject to change without notice.

[www.specialtylightingindustries.com](http://www.specialtylightingindustries.com)

1306 DORIS AVENUE, OCEAN, NJ 07712 USA 800.462.7812 732.517.0800 FAX 732.517.0971 © 06/10