

Single lamp, compact fluorescent, recessed accent light with nominal 6.5" square aperture and glass diffuser.

TYPE: \_\_\_\_\_

JOB: \_\_\_\_\_

SPECIFIER: \_\_\_\_\_

**SPECIFICATIONS**

**HOUSING** - Precision die-formed heavy gauge aluminum with flangeless trim and integrated screed edge. Airtight construction suitable for direct contact with insulation.

**MOUNTING** - Install from below into sheetrock ceiling.

**ELECTRICAL** - Integral electronic, thermally protected ballast. 120v, 277v, (220v 240v, available). Dimming ballast available.

**LAMP** - Triple tube compact fluorescent

**LABELS** - UL, C-UL, Damp location

**SOCKET** - GX24q PBT socket with high temperature, teflon coated lead wires.


**LENS** - Solite borosilicate glass. Others available consult factory

**TRIM** - Flangeless, extruded aluminum pyramidal shield.

**FINISH** - Black powder paint housing. Aperture trim available in black and white as standard. 14 additional colors and RAL palette available. Consult factory for custom finishes.

**APPLICATIONS**

Downlighting in low to medium ceiling heights typically found in residential, commercial and retail applications. Suitable for new or existing construction in sheetrock ceilings.

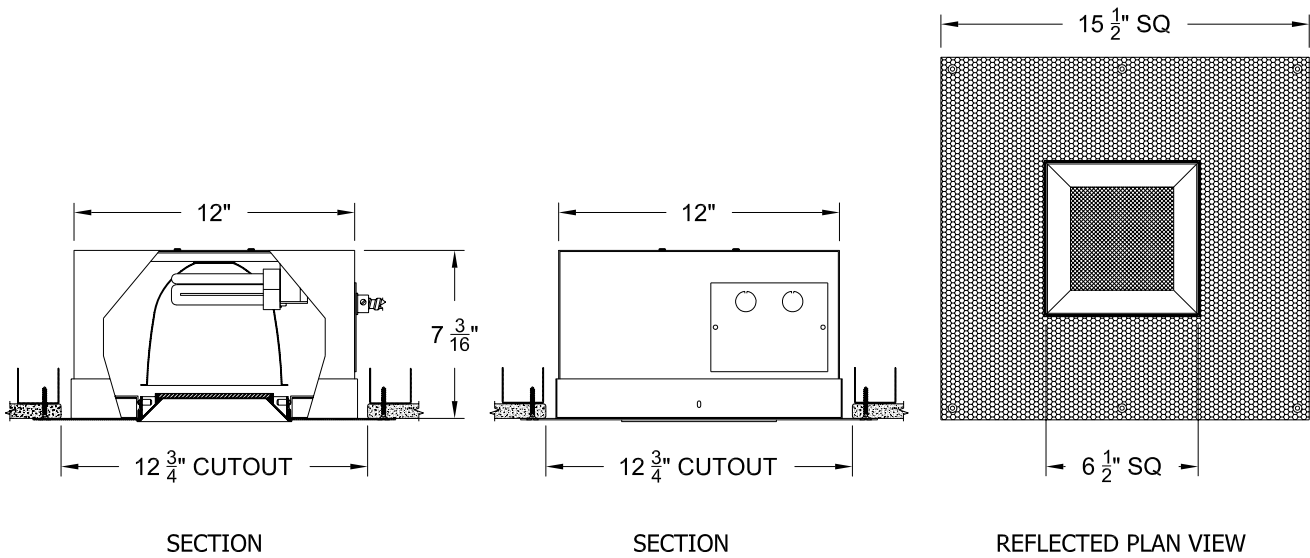

**ORDERING INFORMATION**

HOUSING	TRIM	VOLTAGE	TRIM FINISH	APERTURE LENS
<b>1009-CF__-APH</b>				
Airtight plaster housing. 18 = 18 Watt 24 = 24 Watt 32 = 32 Watt	<b>ZT</b> = Zero Trim	<b>120</b> <b>220</b> <b>240</b> <b>277</b> add <b>DM</b> for dimming	<b>P14</b> = White <b>BLK</b> = Black <b>PXX</b> = SLI Color <b>XXXX</b> = RAL # <b>CST</b> = Custom	<b>91A</b> = Solite <b>92A</b> = Supertex <b>93A</b> = Sandblasted <b>95A</b> = Full Prismatic <b>99A</b> = White Opal



**SPECIALTY LIGHTING INDUSTRIES, INC.**

NOTE: These specifications subject to change without notice.

[www.specialtylightingindustries.com](http://www.specialtylightingindustries.com)

1306 DORIS AVENUE, OCEAN, NJ 07712 USA 800.462.7812 732.517.0800 FAX 732.517.0971 © 12/07