

Fluorescent recessed linear wall washer. Nominal 5" (125mm) wide aperture, flangeless trim and acrylic fresnel lens

TYPE: _____

JOB: _____

SPECIFIER: _____

SPECIFICATIONS

HOUSING - Extruded aluminum housing with minimal flange

SOCKET - Semi-specular low iridescence aluminum reflector. G5 socket with rotor for secure lamp retention

MOUNTING - Recessed in millwork ceiling

LENS - Acrylic fresnel lens

ELECTRICAL - Integral electronic ballast, dimming ballast available. Integral wireway for connection to supply wires

TRIM - Regress trim integral to housing


LAMP - T5 Fluorescent lamp supplied by others

FINISH - Powder paint on all surfaces in black and white as standard. Additional colors and RAL palette available. Consult factory for custom finishes

LABELS - UL, C-UL, Damp location

APPLICATIONS

Small aperture slot used in ceiling heights up to 12 feet (4m) to smoothly wash vertical surfaces such as walls, marker boards, information panels, etc. Suitable for new construction

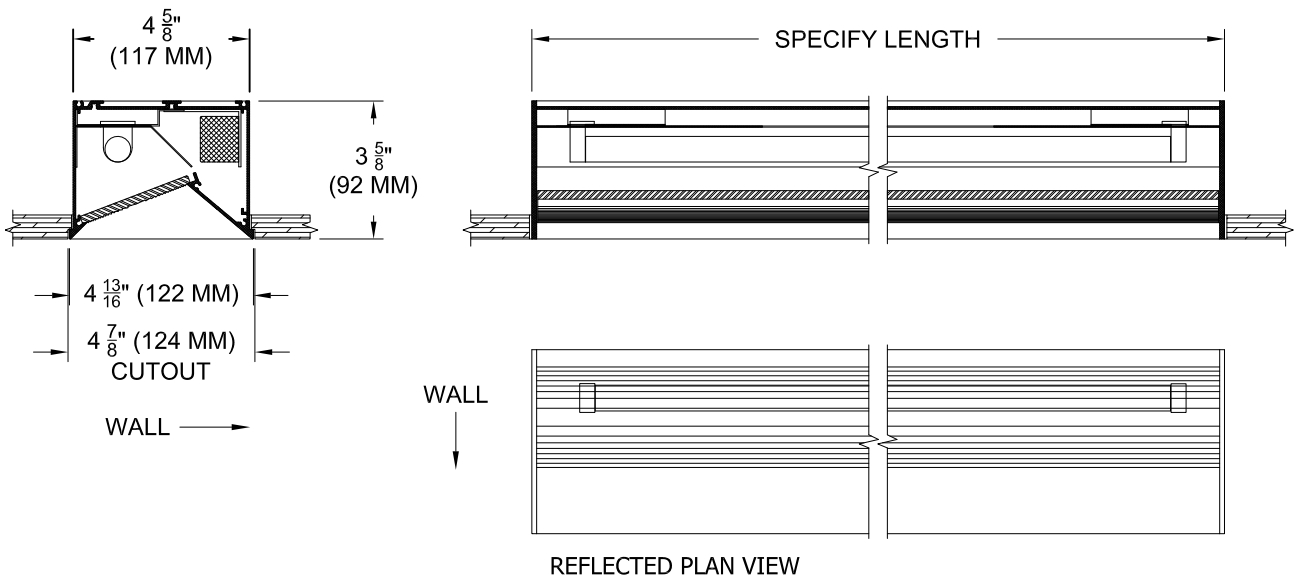

ORDERING INFORMATION

HOUSING	LENGTH	LAMP		BALLAST	TRIM FINISH	LENS
601-T5-WH						
Wood Housing	Specify exact length	Qty	Wattage	120	WHT = White	84A = Fresnel Acrylic
		1	14 24HO	220	BLK = Black	87A = Frosted Fresnel
		2	21 39HO	240	PXX = SLI Color	Acrylic
		3	28 54HO	277	XXXX = RAL Color	
		4	35 80HO	add DM for dimming	CST = Custom	

This information is provided as a specification aid. A submittal will be prepared by the manufacturer for approval prior to fabricating this product.



SPECIALTY LIGHTING INDUSTRIES, INC.

NOTE: These specifications subject to change without notice.

www.specialtylightingindustries.com

1306 DORIS AVENUE, OCEAN, NJ 07712 USA 800.462.7812 732.517.0800 FAX 732.517.0971 © 07/11