

Fluorescent surface mounted linear wall washer with nominal 4" (100mm) wide aperture, integral kick reflector and acrylic fresnel spread lens

TYPE: \_\_\_\_\_

JOB: \_\_\_\_\_

SPECIFIER: \_\_\_\_\_

**SPECIFICATIONS**

**HOUSING** - Extruded aluminum with seamless welded and ground end plates

**SOCKET** - Semi-specular low iridescence aluminum reflector. G5 or G13 socket

**MOUNTING** - Surface mounted on architectural ceiling

**LENS** - Acrylic fresnel lens

**ELECTRICAL** - Integral electronic ballast, dimming ballast available. Fixture comes with 10' whip of 12 Ga. wire for connection to remote junction box

**TRIM** - Semi-specular low iridescence aluminum reflector. G5 or G13 socket


**LAMP** - T5 or T8 Fluorescent lamp supplied by others

**FINISH** - Powder paint on all surfaces in black and white as standard. Additional colors and RAL palette available. Consult factory for custom finishes


**LABELS** - UL, C-UL, Damp location

**APPLICATIONS**


Medium profile extrusion used in ceiling heights up to 12 feet (4m) to smoothly wash vertical surfaces such as walls, marker boards, information panels, etc. Suitable for new or existing construction

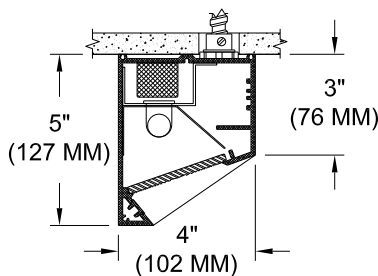

SECTION T5 LAMP



SECTION T8 LAMP

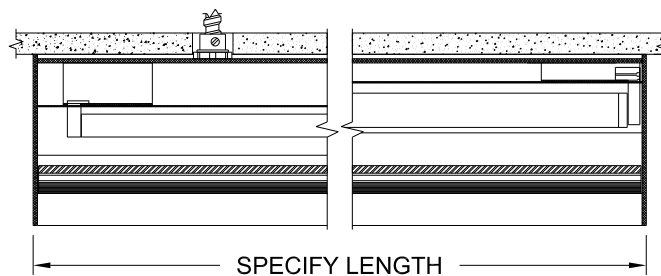

REFLECTED PLAN VIEW

**ORDERING INFORMATION**

HOUSING	LENGTH	LAMP		BALLAST	FINISH	LENS
<b>606-T58-SH</b>						
Surface Housing T5 = T5 lamp T8 = T8 lamp	Specify exact length	Qty	Wattage	120 220 240 277 add DM for dimming	WHT = White BLK = Black PXX = SLI Color XXXX = RAL Color CST = Custom	84A = Fresnel Acrylic 87A = Frosted Fresnel Acrylic
		1	14 17 24HO			
		2	21 25 39HO			
		3	28 32 54HO			
		4	35 40 80HO			

This information is provided as a specification aid. A submittal will be prepared by the manufacturer for approval prior to fabricating this product.



**SPECIALTY LIGHTING INDUSTRIES, INC.**

NOTE: These specifications subject to change without notice.

[www.specialtylightingindustries.com](http://www.specialtylightingindustries.com)

1306 DORIS AVENUE, OCEAN, NJ 07712 USA 800.462.7812 732.517.0800 FAX 732.517.0971 © 07/11