

SPECIFICATIONS

HOUSING - Heavy gauge extruded aluminum (material of corrosion resistant alloy.) Welded aluminum end plate, no visible seam.

REFLECTOR - Specular, low iridescence, aluminum.

ELECTRICAL - T5, T8, 2G11 Biax, integral electronic ballast, 120/277v (dimnable available.)

SOCKET - T5 - G-5 600v, 120w, with rotor for secure lamp retention. T8 - low profile medium bi-pin, 660w, 600v, turn-type lampholder. 2G11 Biax - 2611, PBT, 660v, 600w, with lamp support clip.

MOUNTING - Surface, provide proper support.

TYPE: _____

JOB: _____

LABELS - UL, C-UL - Dry Location.



LAMP - T5, 120/277v - by others.
T8, 120/277v - by others.
2G11 Biax, 120/277v - by others.

LENS - Fresnel acrylic.

FINISH - Powder paint on all surfaces. RAL colors standard, consult factory for custom finishes.

APPLICATIONS

Medium profile, surface mounted, designed to smoothly wash vertical surfaces while minimizing surface texture. Ideal for general perimeter lighting, library stacks, merchandise, collections of objects and collections of art.

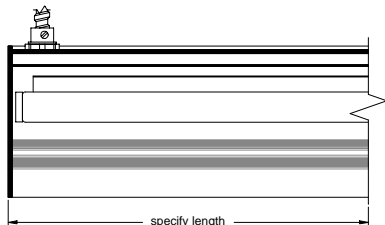

ORDERING INFORMATION

FIXTURE	LAMP	LENGTH	FINISH
#606FL			
Surface mounted wall washing system	14T5 = 14w 24HOT5 = 24w HO 21T5 = 21w 39HOT5 = 39w HO 28T5 = 28w 54HOT5 = 54w HO 2T8 = 2', 17w 3T8 = 3', 25w 4T8 = 4', 32w	specify exact length	WHT = White BLK = Black XXXX = RAL # CST = Custom (must supply chip)



SPECIALTY LIGHTING
INDUSTRIES, INC.

www.specialtylightingindustries.com

1306 DORIS AVENUE, OCEAN, NJ 07712 USA

800.462.7812

732.517.0800

FAX 732.517.0971