

TYPE: _____
 JOB: _____

SPECIFICATIONS

HOUSING - Heavy gauge extruded aluminum (material of corrosion resistant alloy.) Welded aluminum end plate, no visible seam.

REFLECTOR - Specular, low iridescence, aluminum.

ELECTRICAL - T5, T8, integral electronic ballast, 120/277v (dimmbable available.)

SOCKET - G-5, G13, 600v, 120w, with rotor for secure lamp retention.

MOUNTING - Surface, provide proper support.

LABELS - UL, C-UL -Dry Location.



LAMP - T-5, T-8 - by others.

LENS - Fresnel, acrylic.

FINISH - Powder paint on all surfaces. RAL colors standard, consult factory for custom finishes.

APPLICATIONS

Medium profile, surface mounted. Intended to highlight surface texture in brick, stone, stucco, tile, textured paint, fabric and wood panels.

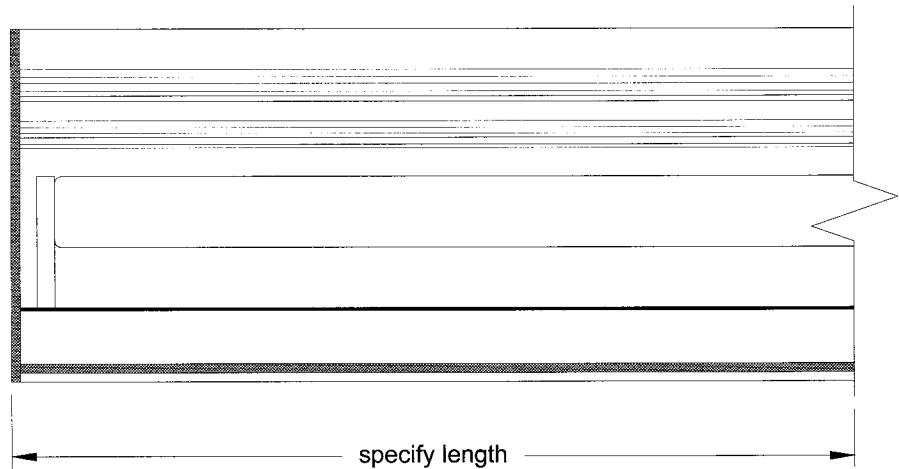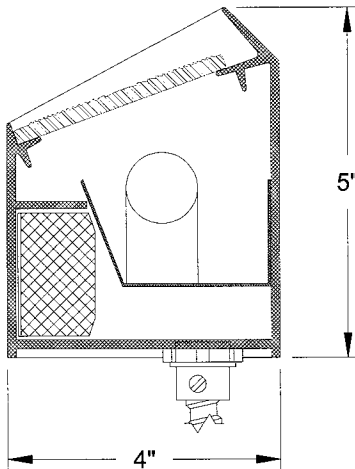

ORDERING INFORMATION

FIXTURE	LAMP	LENGTH	FINISH
#620FL UP			
Surface mounted wall grazing system	14T5 = 14w 24HOT5 = 24w HO 21T5 = 21w 39HOT5 = 39w HO 28T5 = 28w 54HOT5 = 54w HO 2T8 = 2', 17w 3T8 = 3', 25w 4T8 = 4', 32w	specify exact length	WHT = White BLK = Black XXXX = RAL # CST = Custom (must supply chip)



SPECIALTY LIGHTING INDUSTRIES, INC. ©2004

1306 DORIS AVENUE OCEAN, NJ 07712 800.462.7812 732.517.0800 FAX 732.517.0971 www.specialtylightingindustries.com

These specifications subject to change without notice.