

Multi-lamp, low-voltage halogen, surface mounted linear wall grazer with nominal 3" wide aperture and borosilicate supertex spread lens.

TYPE: _____

JOB: _____

SPECIFIER: _____

SPECIFICATIONS

HOUSING - Extruded aluminum with seamless welded and ground end plates.

MOUNTING - Surface mounted

ELECTRICAL - Fixture comes with 10' whip of 10 Ga. wire for connection to remote transformer. Transformer should be sized for the run length and ordered separately.

LAMP - ALR-12, MR-16, 37w max. supplied by others.

LABELS - UL, C-UL, Damp location

SOCKET - Precision die formed aluminum socket plate. G4/G6 ceramic socket or nickel plated steel double contact bayonet base with stainless steel spring for optimum contact. High temperature lead wires.


LENS - Supertex borosilicate glass. Others available consult factory

TRIM - Lens frame integral to housing.

FINISH - Powder paint on all surfaces in black and white as standard. Additional colors and RAL palette available. Consult factory for custom finishes.

APPLICATIONS

illuminate flat surfaces such as venetian plaster or wood, or light specular surfaces such as polished stone or stainless steel.

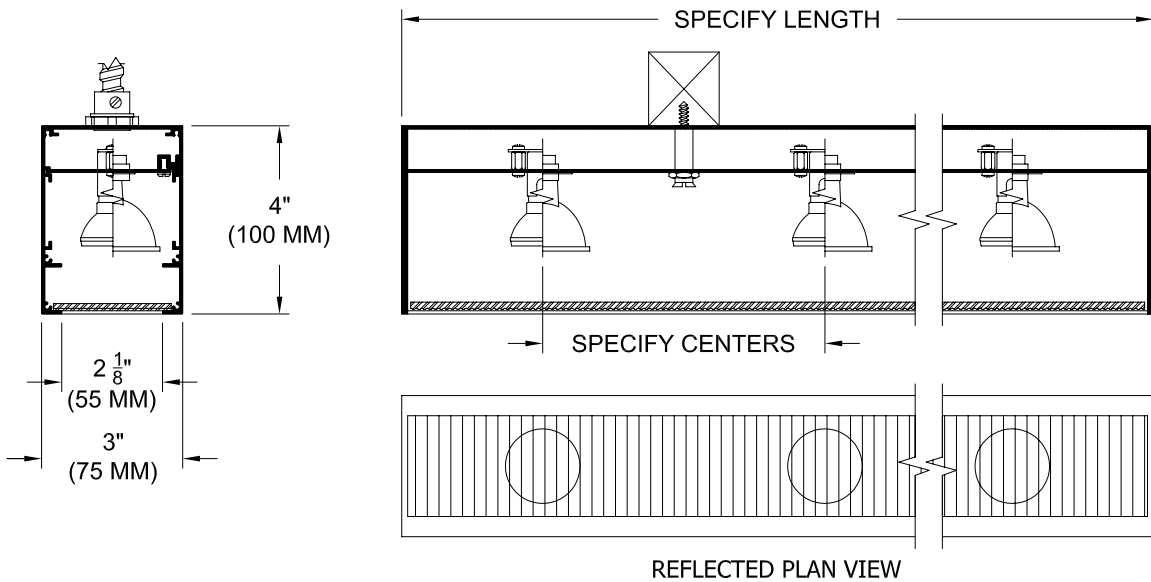

ORDERING INFORMATION

HOUSING	TRANSFORMER	LAMP SPACING	LENGTH	TRIM FINISH	APERTURE LENS
802-__-SH	RX				
Surface Mounted Housing ALR = ALR12 lamp MR = MR16 lamp	RX = Remote	4 = 4" 6 = 6" or custom spacing	Specify exact length	P14 = White BLK = Black PXX = SLI Color XXXX = RAL # CST = Custom	91A = Solite 92A = Supertex 93A = Sandblasted 95A = Full Prismatic 99A = White Opal

This information is provided as a specification aid. A submittal will be prepared by the manufacturer for approval prior to fabricating this product.



SPECIALTY LIGHTING INDUSTRIES, INC.

NOTE: These specifications subject to change without notice.

www.specialtylightingindustries.com

1306 DORIS AVENUE, OCEAN, NJ 07712 USA 800.462.7812 732.517.0800 FAX 732.517.0971 © 02/10