

TYPE: \_\_\_\_\_

JOB: \_\_\_\_\_

## SPECIFICATIONS

**HOUSING** - Heavy gauge extruded aluminum  
(material of corrosion resistant alloy.)  
Aluminum end plate.

**ELECTRICAL** - CMH, integral electronic ballast,  
120/277v.

**SOCKET** - Medium base, porcelain, 660w, 600v, 4K  
pulse rated.

**MOUNTING** - Recessed.

**LABELS** - UL, C-UL -Damp Location.


**LAMP** - PAR 30MH, (spot recommended) - by others.  
Spot lamp recommended.

**LENS** - Supertex borosilicate glass. Others available  
consult factory.

**FINISH** - Black anodized housing. Integral trim, field  
paintable.

## APPLICATIONS

Large profile, recessed or surface mounted with adjustable angle socket plate. Designed to graze down walls and other flat surfaces by positioning the trim of the fixture housing against the surface to be illuminated. Intended to highlight surface texture in brick, stone, stucco, tile, textured paint, fabric and wood panels.

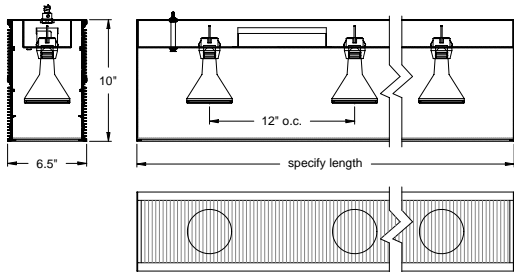

## ORDERING INFORMATION

FIXTURE	LENGTH
#803 PAR30MH	
Recessed or surface mounted linear wall grazing system	specify exact length



**SPECIALTY LIGHTING**  
INDUSTRIES, INC.

www.specialtylightingindustries.com