

Multi-lamp, halogen, recessed linear wall washer with nominal 6" (150mm) wide aperture, adjustable socket plate, minimal flange and regressed borosilicate supertex spread lens

TYPE: _____

JOB: _____

SPECIFIER: _____

SPECIFICATIONS

HOUSING - Extruded aluminum housing with minimal flange

MOUNTING - Recessed in millwork

ELECTRICAL - Integral wireway for connection to supply wires

LAMP - PAR20 50w max PAR30S (short neck) 75w max supplied by others

LABELS - UL, C-UL, Damp location

SOCKET - Precision die-formed adjustable aluminum socket plate. Medium base porcelain socket with high temperature, teflon coated lead wires


LENS - Supertex borosilicate glass. Others available consult factory

TRIM - Regress trim integral to housing

FINISH - Powder paint on all surfaces in black and white as standard. Additional colors and RAL palette available. Consult factory for custom finishes

APPLICATIONS

Medium aperture wall washer used in ceiling heights up to 16 feet (5m) to smoothly wash vertical surfaces and minimize surface texture

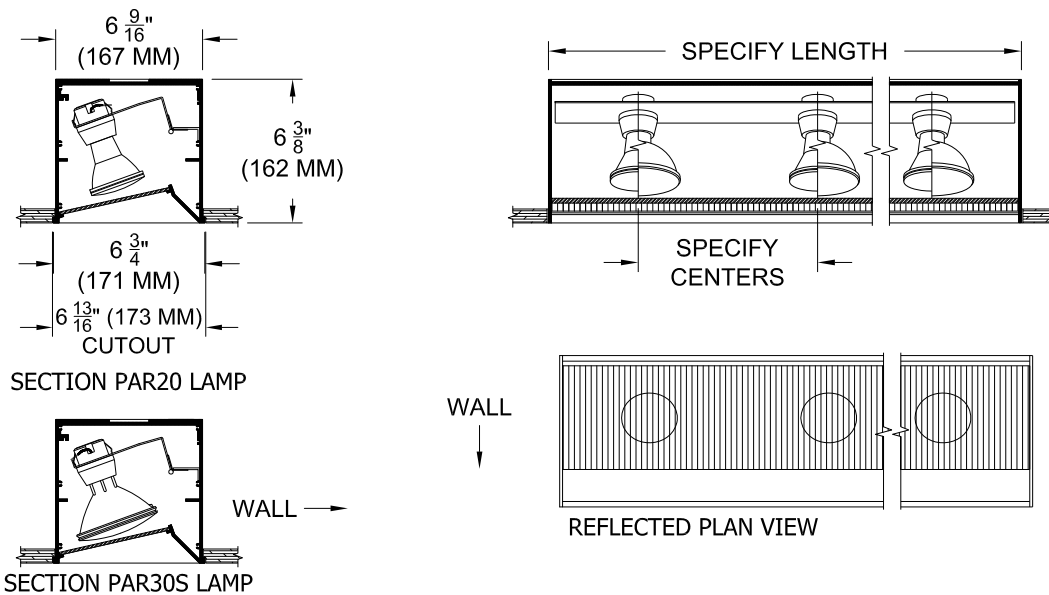

ORDERING INFORMATION

HOUSING	LENGTH	LAMP SPACING	TRIM FINISH	APERTURE LENS
807-PAR__-WH				
Wood Housing 20 = PAR20 30 = PAR30	Specify exact length	6 = 6" (150mm) 9 = 9" (225mm) 12 = 12" (300mm) or custom spacing	WHT = White BLK = Black PXX = SLI Color XXXX = RAL # CST = Custom	82A = Frosted Supertex 92A = Supertex

This information is provided as a specification aid. A submittal will be prepared by the manufacturer for approval prior to fabricating this product.



SPECIALTY LIGHTING INDUSTRIES, INC.

NOTE: These specifications subject to change without notice.

www.specialtylightingindustries.com

1306 DORIS AVENUE, OCEAN, NJ 07712 USA 800.462.7812 732.517.0800 FAX 732.517.0971 © 07/11