

Multi-lamp, solid state light engine, recessed linear wall grazer with flangless housing, nominal 1.5" (38mm) wide aperture parabolic baffle and regressed acrylic lens.

TYPE: \_\_\_\_\_

JOB: \_\_\_\_\_

SPECIFIER: \_\_\_\_\_

**SPECIFICATIONS**

**HOUSING** - Extruded aluminum housing with utrim plaster frame

**SOCKET** - Circuit board mounted to extruded aluminum heatsink. Inline connectors allow removal and replacement

**MOUNTING** - Recessed in sheetrock ceiling

**LENS** - Acrylic diffusing lens Others available consult factory

**ELECTRICAL** - Integral electronic 12v, 500ma 0-10v dimmable driver. Remote 12VAC transformer should be sized for the run length and ordered separately

**TRIM** - Lens frame integral to housing


**LAMP** - 2 watt 3000K LED 2" o.c. supplied with fixture

**FINISH** - Powder paint on all surfaces in black and white as standard. Additional colors and RAL palette available. Consult factory for custom finishes

**LABELS** - CSA-C,US, Damp Location

**APPLICATIONS**

Narrow profile wall grazer used in ceiling heights up to 10 feet (3m) to highlight the texture in surfaces such as stucco or brick, illuminate flat surfaces such as venetian plaster, fabric or wood, or specular surfaces such as polished stone or stainless steel

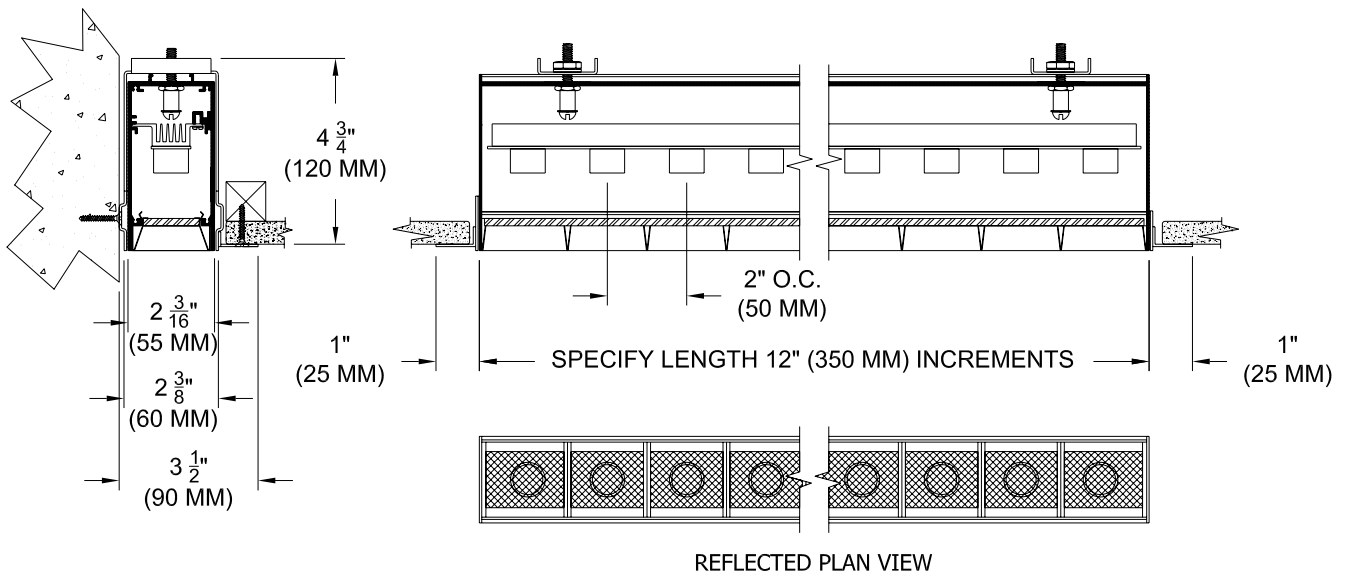

**ORDERING INFORMATION**

HOUSING	LENGTH	TRANSFORMER		FINISH	APERTURE LENS
<b>811-LED-PH</b>		/			
Plaster Flange Housing	Specify length to nearest 6" (150mm)	EX =Electronic RX = Remote	120 220 240 277	WHT = White BLK = Black PXX = SLI Color XXXX = RAL # CST = Custom	71 = Overlay Acrylic 91 = Solite

This information is provided as a specification aid. A submittal will be prepared by the manufacturer for approval prior to fabricating this product.



**SPECIALTY LIGHTING INDUSTRIES, INC.**

NOTE: These specifications subject to change without notice.

[www.specialtylightingindustries.com](http://www.specialtylightingindustries.com)

1306 DORIS AVENUE, OCEAN, NJ 07712 USA 800.462.7812 732.517.0800 FAX 732.517.0971 © 07/11