

TYPE: _____
 JOB: _____

SPECIFICATIONS

HOUSING - Heavy gauge extruded aluminum (material of corrosion resistant alloy.) Aluminum end plates.

ELECTRICAL - MR-11, remote transformer required, sold separately.

SOCKET - Precision die formed aluminum socket plate. G-4/G-6 with 250°C 600v Teflon coated lead wires.

MOUNTING - Recessed, use ULTRIM frame for GWB/plaster ceilings.

LABELS - UL, C-UL -Dry Location.


LAMP - MR-11, 12v, 20w (narrow spot recommended) - by others.

LENS - Supertex borosilicate glass. Others available consult factory.

FINISH - Powder paint on all surfaces. RAL colors standard, consult factory for custom finishes.

APPLICATIONS

Medium profile, recessed in plenum, designed to smoothly wash vertical surfaces while minimizing surface texture. Ideal for general perimeter lighting, library stacks, merchandise, collections of objects and collections of art.

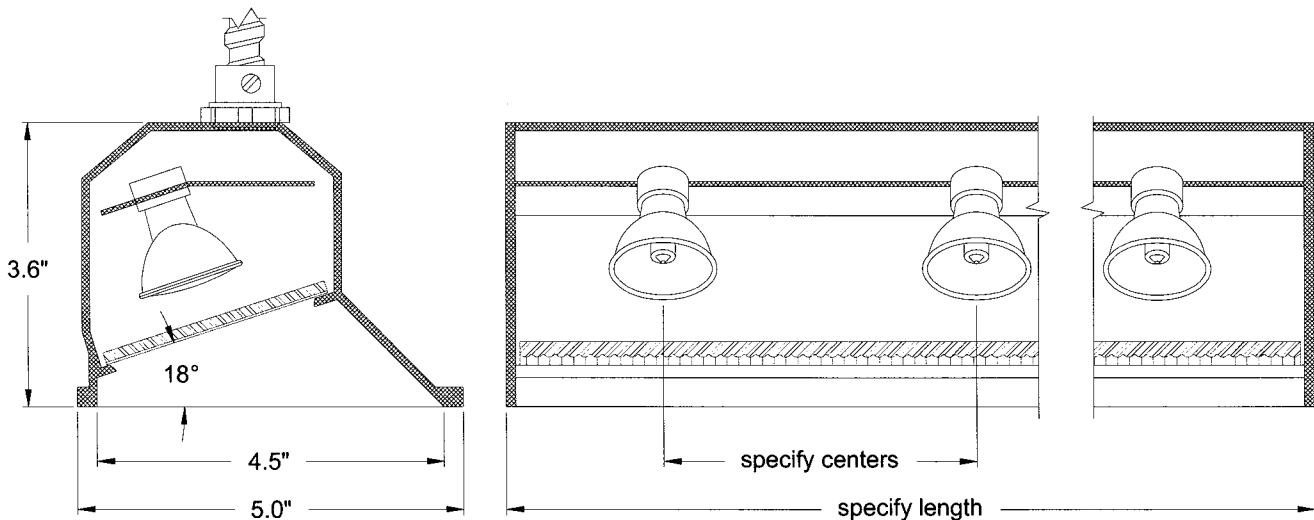

ORDERING INFORMATION

FIXTURE	LAMP CENTERS	LENGTH	FINISH	CEILING
#813MR				
Recessed linear wall wash system	4 = 4" 6 = 6"	specify exact length	WHT = White BLK = Black XXXX = RAL # CST = Custom (must supply chip)	PL = plaster WD = wood



SPECIALTY LIGHTING INDUSTRIES, INC. ©2004

1306 DORIS AVENUE OCEAN, NJ 07712 800.462.7812 732.517.0800 FAX 732.517.0971 www.specialtylightingindustries.com

These specifications subject to change without notice.