

**SPECIFICATIONS**

**HOUSING** - Heavy gauge extruded aluminum (material of corrosion resistant alloy.) Welded aluminum end plate, no visible seam.

**ELECTRICAL** - MR-16, remote transformer required, sold separately. Maximum 74 watts per foot.

**SOCKET** - Precision die formed aluminum socket plate. G-4/G-6 with 250°C 600v Teflon coated lead wires.

**MOUNTING** - Surface, provide proper support.

TYPE: \_\_\_\_\_

JOB: \_\_\_\_\_

**LABELS** - UL, C-UL -Dry Location.



**LAMP** - MR-16, 12v (narrow spot recommended) - by others.

**LENS** - Supertex borosilicate glass cemented in frame. Others available, consult factory.

**FINISH** - Powder paint on all surfaces. RAL colors standard, consult factory for custom finishes.

**APPLICATIONS**

Medium profile, surface mounted. Designed to graze down walls and other flat surfaces. Adjustable angle socket plate. Intended to highlight surface texture in brick, stone, stucco, tile, textured paint, fabric and wood panels. Perfect for vertical installations or elevator cabs.

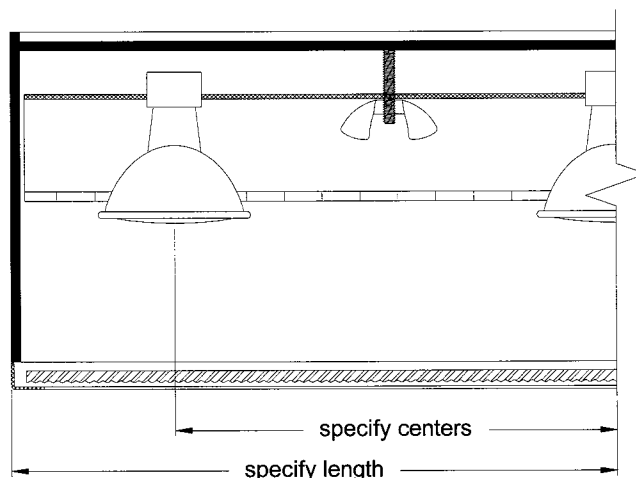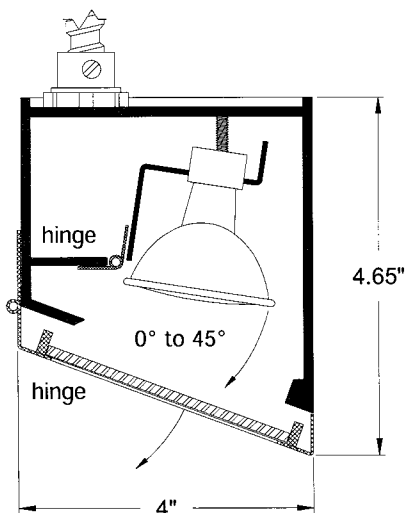

**ORDERING INFORMATION**

FIXTURE	LAMP	LAMP CENTERS	LENGTH	FINISH
<b>#814 VERT</b>				
Surface mounted wall grazing system	<b>20MR-16</b> = 12v, 20w <b>37MR-16</b> = 12v, 37w (maximum 74w per foot)	<b>4</b> = 4" <b>6</b> = 6" <b>8</b> = 8"	specify exact length	<b>WHT</b> = White <b>BLK</b> = Black <b>XXXX</b> = RAL # <b>CST</b> = Custom (must supply chip)



**SPECIALTY LIGHTING INDUSTRIES, INC.** ©2004

1306 DORIS AVENUE OCEAN, NJ 07712 800.462.7812 732.517.0800 FAX 732.517.0971 [www.specialtylightingindustries.com](http://www.specialtylightingindustries.com)

These specifications subject to change without notice.