



GRW-F-SQ - Recessed Accent Wall Washer - Fixed, Square

Graffiti GRW Series (wall wash); fixed square recessed accent downlight. Die cast aluminium fixture. Die cast aluminium trim available in white or black as standard. Custom RAL available.

Overall Height: 102mm (with trim)
Overall Width: Varies, see trims (Page 2)

Aperture Size: 65mm
Trim Regress: 35mm at deepest point
Ceiling Cut Out Size: (See Page 2)

Trim

One piece die cast aluminium, flanged or flangeless trim with regressed bevel and overlap for flange. Available for wet locations. Accommodates up to 25.4mm ceiling thickness as standard.

ZT - For use in plaster/GWB ceilings
FT/FST - For use in architectural ceilings

LED

AD - Ambient Dim - 1900-3000k, 97 CRI
AD14 - 14.5W / 1000lm (LED) / 475lm (Delivered)

CZ - Citizen - 2700-4000k, 90+ CRI
CZ20 - 20W / 2265lm (LED) / 786lm (Delivered)

For Xicato options, please contact sales team.

Trim Finish

White, black, or custom RAL colours available.

Warranty

5 Year limited on LED and driver. See website for details.

Electrical

DA - DALI Dimming down to 0.1%
DAE - DALI Emergency
ND - Switched, Non-Dimming
NDE - Switched, Non-Dimming Emergency

Lens/Beam

82A - Supertex

IP Rating

Standard fixture with lens is IP20. For IP65, lens must be completely sealed with shower trim (only available for flanged trims).

Additional LED Information

LED	Power	Output *	Lm/W	CCT	CRI
AD14	14W	475lm	63lm/w	19-30 (CCT)	97
CZ20	20W	786lm	71lm/w	27/30/35/40	90+

*Delivered Output


Lens Detail

82A (Supertex Lens)

Clear water white borosilicate glass with linear prisms, bottom surface frosted - spreads light in one direction. Used in linear wall grazers and wall washers to blend adjacent lamps and create a smooth even wash. Used with uncoated lamps in wall washers to create a smooth even finish.


Dimensions

(F) Fixed

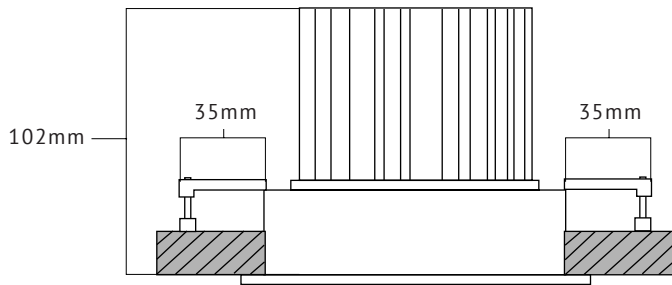


Trim Detail

FT/FST* (Flanged Trim/Flanged Shower Trim)


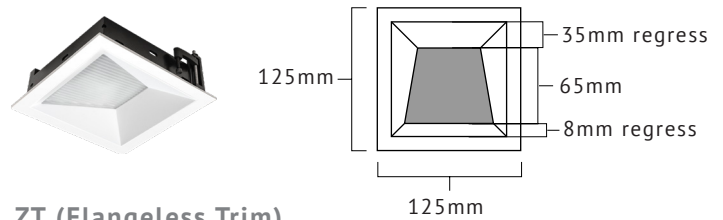


ZT (Flangeless Trim)

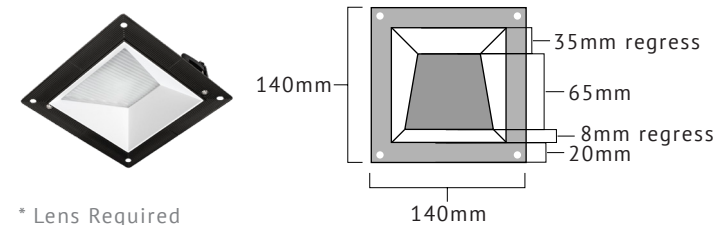

* Lens Required

Cut Out Hole Guidelines

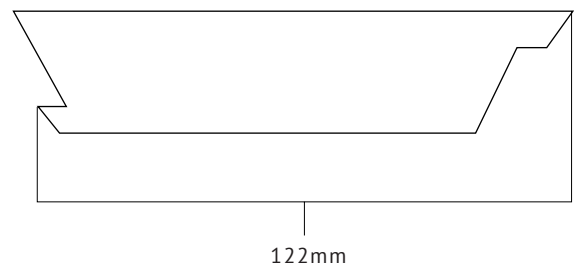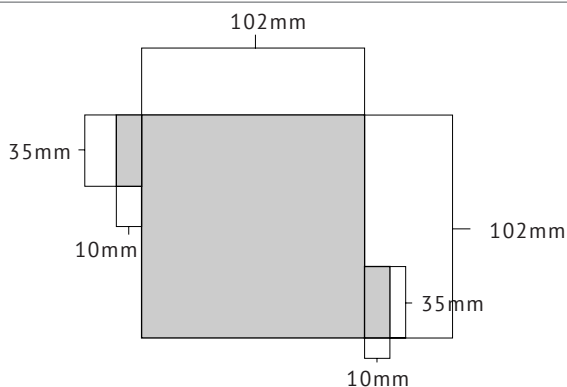

Input code here


GRW-Ri

	Part	Order Codes	GRW-Ri
1	LED	AD14 - Ambient Dim, 97CRI -14.5W, 61lm/W CZ20 - Citizen, 90+CRI - 20W, 71lm/W	----
2	TYPE	F - Fixed	----
3	CCT	AD - 1900-3000k 27 - 2700k (CZ20) 30 - 3000k (CZ20) 35 - 3500k (CZ20) 40 - 4000k (CZ20)	----
4	DRIVER	DA - DALI Dimming down to 0.1% DAE - DALI Dimming down to 0.1%, Emergency ND - Switched, Non-Dimming NDE - Switched, Non-Dimming, Emergency	----
5	TRIM	FT-IP20 - Flanged, IP20 FT-IP64 - Flanged, IP64 FST-IP65 - Flanged Shower, IP65 ZT-IP20 - Flangeless, IP20	----
6	TRIM COLOUR	WHT - White, RAL 9016 BLK - Black, RAL 9003	* ----
7	SHAPE	RD - Round	----

* For custom RAL colour, please contact sales team.

Example Code:

GRW-Ri	—	AD14	—	F	—	30	—	DA	—	ZT-IP20	—	WHT	—	RD
		1		2		3		4		5		6		7