





Exposed Ceiling Joists. Connect all wiring for housing before GWB installation.

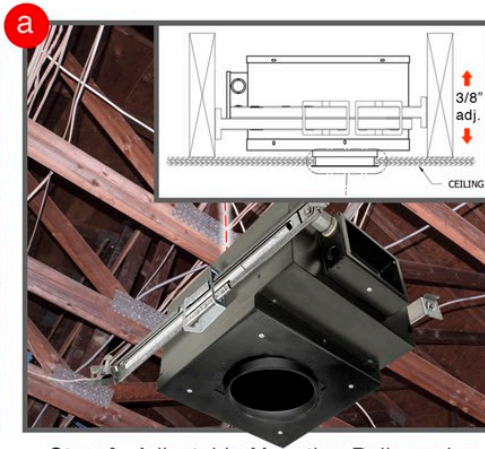

**Step A**- Adjustable Mounting Rails anchor housing to ceiling joists with screws. Housing can be adjusted vertically. *See Details above.*

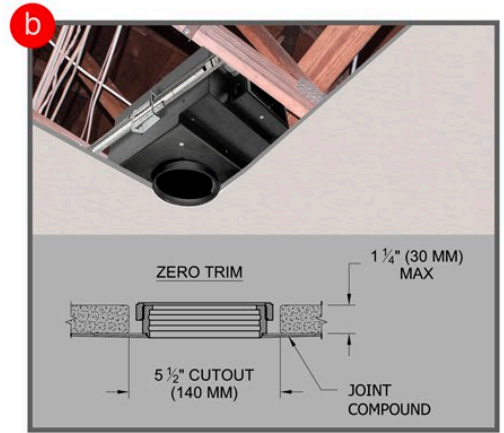

**Step B**- After housing is secured, finish ceiling installation.



**Step C/D**- Secure plaster receiver to housing by screwing receiver into housing.



**Step E**- With Plaster receiver tightly secure against GWB, add GWB screws to further secure plaster receiver.  
**Step F**- Apply tape and joint compound (dry). Plaster over ceiling and receiver.



**Step G**- Multi-layer plaster job over GWB ceiling. Paint over plaster finish.

**IMPORTANT**  
Ball Plunger on round trim needs to click into grooves in plaster receiver

**1016 & 1250**  
uses Ball Plunger locking system

**1000 & 1001**  
uses J-hook. Align J hook with pin on housing, turn clockwise to lock

\*Trim in view is 1016- Round Plaster flange

**trims available**

1000- Round Plaster

1250- Round Plaster

1001- Round Plaster

1016- Round Plaster

**Instruction sheet  
for Plaster install  
1000, 1001,  
1016, 1250**



Final step is to make sure trim is locked using either ball plungers or j-hook

**NOTE**- Fixture has vertical adjustability, **except** when plaster has been finished.

# ROUND PLASTER CEILING INSTALLATION

