REGRESSED SQUARE APERTURE ADJUSTABLE ACCENT LIGHT

1017-LED-LUMX-UH

Single lamp, solid state light engine, recessed accent light with nominal 4" (100mm) square trim, 3"(75mm) aperture and optional glass diffuser. Accent and downlighting in medium to high ceiling heights typically found in residential, commercial and retail applications. Suitable for new construction.

SPECIFICATIONS

HOUSING

Precision die-formed heavy gauge aluminum

MOUNTING

· Recessed in architectural ceiling

ELECTRICAL

· Integral dimmable electronic driver with internal short circuit protection

LAMD

· Lumenetix LED supplied with fixture

SOCKET

· Precision aluminum yoke with CNC machined lampholder assembly

LENS

- Interchangeable reflector provides multiple beam patterns
- · Optional borosilicate lenses available for aperture

TRIM


- Flanged or flangeless, one piece die-cast aluminum pyramidal shield
- · ST is flanged trim fully sealed and gasketed. Aperture lens required


FINISH

- · Black powder paint housing
- · Aperture trim available in black and white as standard
- · Solid wood, additional colors, RAL palette, custom finishes


LABELS

• Damp location, Wet with ST trim

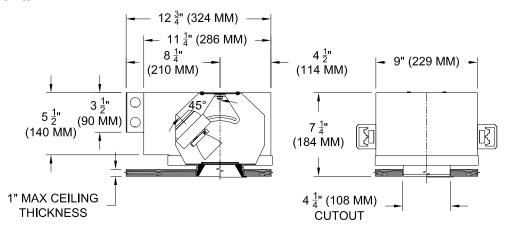







(110MM)

ORDERING INFORMATION

1017-LED-LUMX-UH	TRIM	DRIVER	BEAMSPREAD	TRIM FINISH	APERTURE LENS
Universal Housing Lumenetix 1800-6500K	FT=Flanged Trim PT=Panel Trim** ST=Shower Trim* ZT=Zero Trim **WXX Only *Aperture lens required	S1 =0-10V 1% dimming DALI =1% dimming DMX =1% dimming L3 = EcoSystem 1% dimming	20 = 20 Degrees 30 = 30 Degrees 40 = 40 Degrees	P14 = White BLK=Black PXX = SLI Color WXX = Wood XXXX = RAL # CST = Custom	Blank= None 90A = Clear 91A = Solite 92A = Supertex 93A = Frosted



Patent Pending. These specifications subject to change without notice.