

Single lamp, solid state light engine, recessed 2" (50mm) aperture down light. Flood aperture with low brightness parabolic reflector or glass aperture with decorative glass cylinder.

TYPE: \_\_\_\_\_

JOB: \_\_\_\_\_

SPECIFIER: \_\_\_\_\_

**SPECIFICATIONS**

**HOUSING** - Precision die-formed heavy gauge aluminum with machined adjustable ceiling collar. Airtight construction suitable for direct contact with insulation.

**MOUNTING** - Recessed in architectural ceiling.

**ELECTRICAL** - Integral electronic driver with internal short circuit protection. 120-277v primary, 0-10v dimmable driver available.

**LAMP** - BridgeLux LED supplied with fixture. See performance information for available Color temperature and CRI.

**LABELS** - CSA-C,US, Damp location, Wet with ST trim, ASTM E283 Airtight, Suitable for direct contact with thermal insulation. AUHC for use in Chicago plenum.

**SOCKET** - Precision CNC machined lampholder assembly. Usocket™ allows easy field replacement of light engine.


**LENS** - Interchangeable reflector provides multiple beam patterns. Optional borosilicate lenses available for aperture.

**TRIM** - Spun anodized aluminum reflector cone or decorative glass cylinder.

**FINISH** - Black powder paint housing. Aperture trim in clear and gold alzak, black or white. Additional colors and RAL palette available. Consult factory for custom finishes.

**APPLICATIONS**

General downlighting in low to medium ceiling heights typically found in residential, commercial and retail applications. Suitable for new construction.

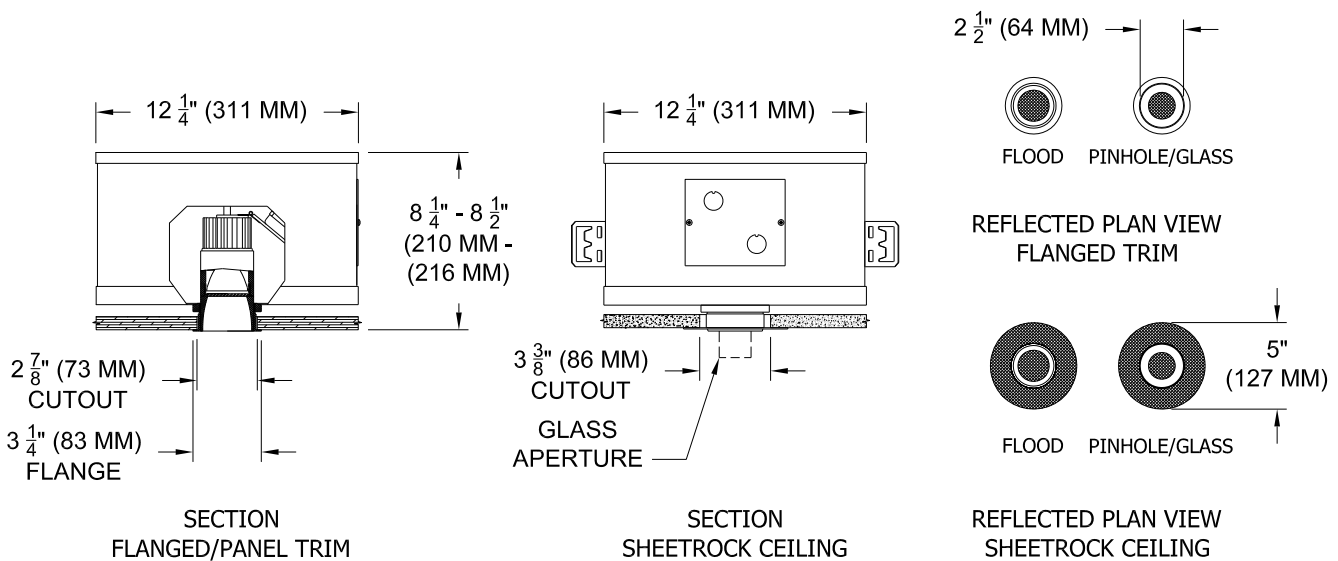

**ORDERING INFORMATION**

HOUSING	TRIM	APERTURE	DRIVER	BEAMSPREAD	TRIM FINISH	APERTURE LENS
4500-LEDB ___-AUH						
Airtight Universal Housing AUHC = Chicago Plenum 8 = 80CRI 27 = 2700K 9 = 97CRI 30 = 3000K 35 = 3500K 40 = 4000K	FT = Flanged Trim PT = Panel Trim ST = Shower Trim ZT = Zero Trim	FA = Flood GA = Glass	123 = 120v-277v HU 125 = 120v-277v HE	15 = 15 Degrees 24 = 24 Degrees 38 = 38 Degrees	CAA = Clear (FA) GAA = Gold (FA) P14 = White BLK = Black PXX = SLI Color CST = Custom	Blank = None 91A = Solite 92A = Supertex 93A = Frosted 95A = Full Prismatic

[CLICK HERE](http://www.specialtylightingindustries.com) for LED and driver performance information including wattage and lumen output or go to [www.specialtylightingindustries.com](http://www.specialtylightingindustries.com).



**SPECIALTY LIGHTING INDUSTRIES, INC.**

NOTE: These specifications subject to change without notice.

[www.specialtylightingindustries.com](http://www.specialtylightingindustries.com)

1306 DORIS AVENUE, OCEAN, NJ 07712 USA 800.462.7812 732.517.0800 FAX 732.517.0971 ©11/14