

Single lamp, solid state light engine, recessed 2" (50mm) aperture down light. Flood aperture with low brightness parabolic reflector or glass aperture with decorative glass cylinder. General downlighting in medium ceiling heights typically found in residential, commercial and retail applications. Suitable for new construction.

## SPECIFICATIONS

### HOUSING

- Precision die-formed heavy gauge aluminum

### MOUNTING

- Recessed in architectural ceiling

### ELECTRICAL

- Integral electronic driver with internal short circuit protection
- 120v-277v primary, compatible with 0-10v dimmers. Also available for 120v phase control or Lutron

### LAMP

- Xicato LED supplied with fixture

### SOCKET

- Precision CNC machined lampholder assembly

### LENS

- Interchangeable reflector provides multiple beam patterns
- Optional borosilicate lenses available for aperture

### TRIM

- Spun anodized aluminum reflector cone or decorative glass cylinder

### FINISH

- Aperture trim available in numerous colors
- Additional colors and RAL palette available
- Consult factory for custom finishes

### LABELS

-  , US tested to UL standards 1598, Wet or Damp location



**JOB:** \_\_\_\_\_

**SPECIFIER:** \_\_\_\_\_


**TYPE:** \_\_\_\_\_

**QUANTITY:** \_\_\_\_\_

**SIGNATURE:** \_\_\_\_\_

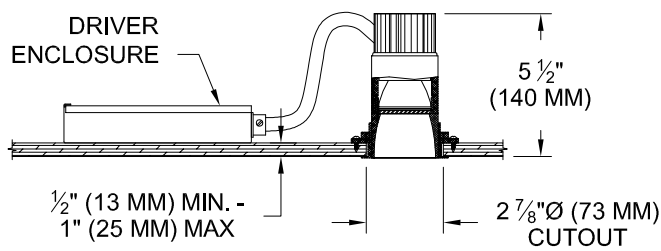

REFLECTED PLAN VIEW  
FLANGED TRIM

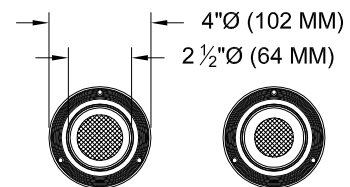

## ORDERING INFORMATION

4500-LEDX-ZH	TRIM	APERTURE	DRIVER	BEAMSPREAD	TRIM FINISH	APERTURE LENS
			/			
Zero Housing 8 = 80CRI 27 = 2700K 9 = 98CRI 30 = 3000K 35 = 3500K 40 = 4000K	FT=Flanged Trim PT=Panel Trim** ST=Shower Trim* ZT=Zero Trim **WXX Only *Aperture lens required	FA = Flood GA = Glass PA = Pinhole	XT8 = 120v-277v, 8W 800lm XT12 = 120v-277v, 12W 1055lm S1 = 0-10v dimming, 1%, 120-277v T1 = TRIAC/ELV 2-wire, 3% 120v (Lead/Trail Edge) E1 = EldoLED 0-10V Logarithmic Dim, 0.1%, 120-277v E2 = EldoLED DALI, 0.1%, 120-277v E3 = EldoLED 0-10V Linear Dim, 0.1%, 120-277v L2 = Ltrn Hi-lume 1% 2-wr LED driver (120v fwd phase) L3 = Ltrn Hi-lume 1% 3-wire/EcoSystem, 120-277v LTB = Lutron Hi-lume 1% EcoSys LED driver, 1%, 120-277v, Soft-on, Fade-to-Black	30 = 30 Degrees 40 = 40 Degrees	CAA = Clear (FA) GAA = Gold (FA) P14 = White BLK=Black PXX = SLI Color XXXX = RAL# CST = Custom	Blank= None 79A= Veiling Acrylic 91A= Solite 93A= Frosted

\*ELDO and Lutron are remote mounted