

Single lamp, solid state light engine, recessed nominal 3" (70mm) aperture down light. Aperture with low brightness parabolic reflector. General downlighting in medium ceiling heights typically found in residential, commercial and retail applications. Suitable for new construction

SPECIFICATIONS

HOUSING

- Precision die-formed heavy gauge aluminum

MOUNTING

- Recessed in architectural ceiling

ELECTRICAL

- Integral dimmable electronic driver with internal short circuit protection

LAMP

- Citizen or AmbientDim™ LED supplied with fixture

SOCKET

- Precision CNC machined lampholder assembly

LENS

- Interchangeable reflector provides multiple beam patterns
- Optional borosilicate lenses available for aperture

TRIM

- Spun anodized aluminum reflector cone

FINISH

- Aperture trim available in black and white as standard
- RAL palette, custom finishes available

LABELS

-  , US tested to UL standards 1598, Damp location


JOB: _____

SPECIFIER: _____

TYPE: _____

QUANTITY: _____

SIGNATURE: _____

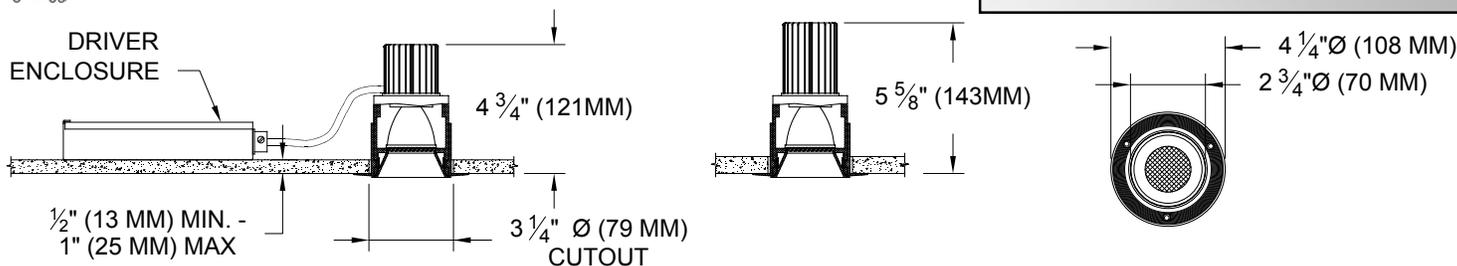

SECTION CZ14 /AD14
PLASTER TRIM

SECTION CZ20
SHEETROCK CEILING

REFLECTED PLAN VIEW

LENS REFLECTOR FINISHES



LR13

LR14

LR15

LR16

LR17

ORDERING INFORMATION

4803-LED-ZH	TRIM	SOURCE / DRIVER	BEAMSPREAD	TRIM FINISH	FLANGED FINISH*
		/			
Zero Housing 9 = 90+CRI 27 = 2700K 30 = 3000K 35 = 3500K 40 = 4000K AD = Ambient Dim Max 3000K-1900K	ZT=Zero Trim FT=Flanged Trim	CZ14=14W 1640lm CZ20= 20W 2265lm AD14=14.5W,1000lm C1 =0-10V dimming, 1%, 120-277v C2 =TRIAC/ELV 2-wire, 1% 120v (Lead/Trail Edge) E1 =EldoLED 0-10V Logarithmic Dim, 0.1%, 120-277v E2 =EldoLED DALI, 0.1%, 120-277v E3 =EldoLED 0-10V Linear Dim, 0.1%, 120-277v L2 =Lutron Hi-lume 1% 2-wr LED driver (120v forward phase) LTB =Lutron Hi-lume 1% EcoSys LED driver, 1%, 120-277v, Soft-on, Fade-to-Black	15 = 15 Degrees 24 = 24 Degrees 38 = 38 Degrees	LR13 = Silver LR14 = Champagne LR15 = Black LR16 = Matte Gray LR17 = Gold	P14 = White BLK = Black ANA = Aluminum CST = Custom *Only required for Flanged Trim

*ELDO and Lutron are remote mounted