

Multi-lamp, solid state light engine, recessed linear wall grazer with flangless housing, nominal 2" (51mm) wide aperture and regressed acrylic lens. Narrow profile wall grazer used in low ceiling heights to highlight the texture in surfaces such as stucco or brick, illuminate flat surfaces such as venetian plaster, fabric or wood, or specular surfaces such as polished stone or stainless steel.

SPECIFICATIONS

HOUSING

- Extruded aluminum housing with integral flange
- ⚡ Airtight construction suitable for direct contact with insulation

MOUNTING

- Recessed in architectural ceiling

ELECTRICAL

- Integral dimmable electronic driver with internal short circuit protection

LAMP

- 2 watt LED supplied with fixture

SOCKET

- Circuit board mounted to extruded aluminum heatsink
- Inline connectors allow removal and replacement

LENS

- Acrylic diffusing lens. Others available consult factory

TRIM

- Overlap flange integral to housing
- ST is flanged trim fully sealed and gasketed. Aperture lens required

FINISH

- Powder paint on all surfaces in black and white as standard
- Additional colors and RAL palette available
- Custom finishes available

LABELS

-  , US tested to UL standards 1598, Damp location, Wet with ST trim, IC/Airtight, Title 24



JOB: _____

SPECIFIER: _____

TYPE: _____

QUANTITY: _____

SIGNATURE: _____

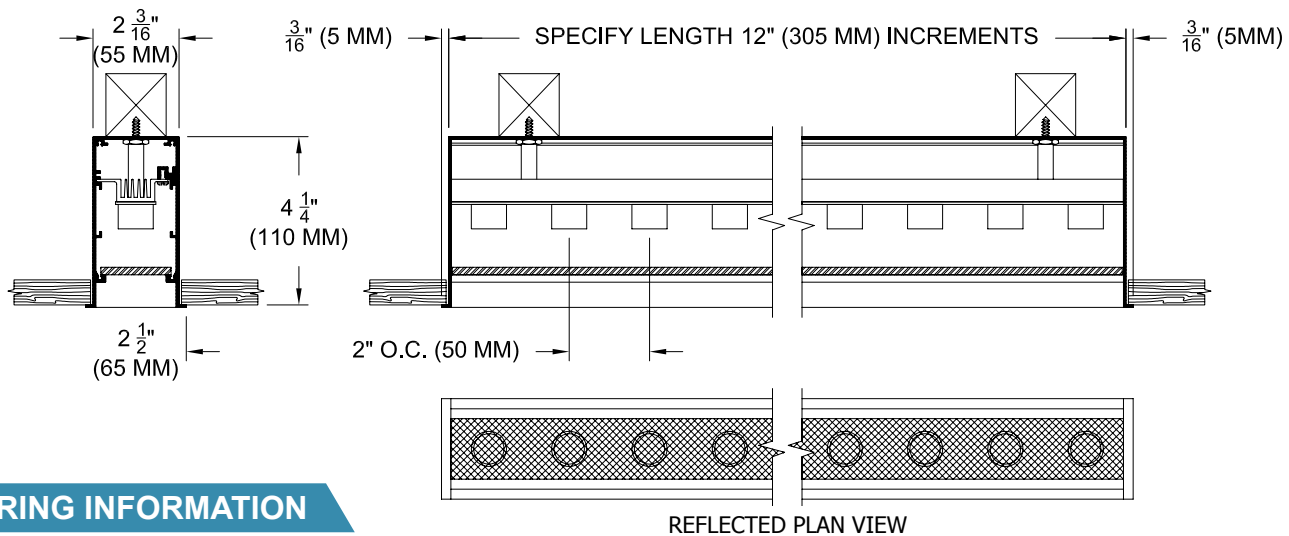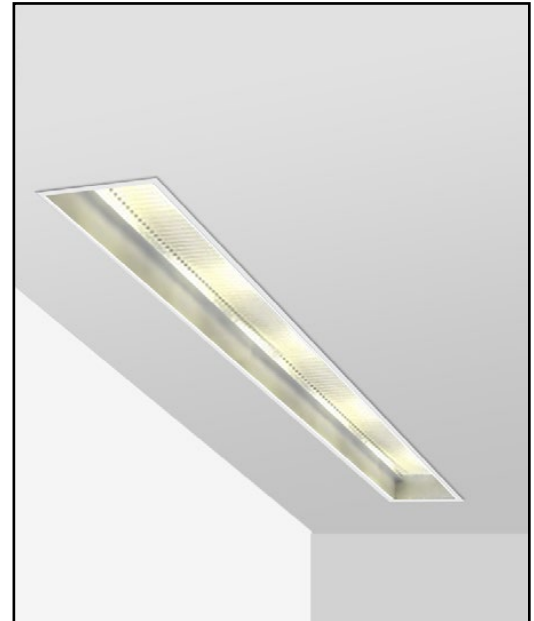

ORDERING INFORMATION

805-LED-AFH	LENGTH	DRIVER	FINISH	APERTURE LENS	ACCESSORIES
Airtight Flanged Housing 8 = 80 CRI 27 = 2700K 9 = 90+CRI 30 = 3000K 35 = 3500K	Specify exact length in increments of 12" (300 mm) Min. 2' required for integral driver	UN2 =120v-277v, 0-10v Dim. 9W/ft 1100lm/ft (nom.) UN3 =120v-277v, 0-10v Dim. 9W/ft 600lm/ft (nom.) UN5 =120v-277v, 0-10v Dim. 12W/ft 700lm/ft (nom.) 122LT2 =120v, Lutron 2 wire 9W/ft 1100lm/ft (nom.) 122LT3 =120v, Lutron 3 wire 9W/ft 1100lm/ft n(nom.) 123LT2 =120v, Lutron 2 wire 9W/ft 600lm/ft (nom.) 123LT3 =120v, Lutron 3 wire 9W/ft 600lm/ft (nom.) 125LT2 =120v, Lutron 2 wire 12W/ft 700lm/ft (nom.) 125LT3 =120v, Lutron 3 wire 12W/ft 700lm/ft (nom.)	WHT = White BLK=Black PXX = SLI Color XXXX = RAL # CST = Custom	79A = Veiling Acrylic 91A = Solite	ST = Shower Trim* LC = Lens Clip *Aperture lens required



Patent Pending.
These specifications subject to change without notice.

www.specialtylightingindustries.com
1306 Doris Avenue, Ocean, NJ 07712 USA
800.462.7812 732.517.0800 FAX:732.517.0971