

Multi-lamp, solid state light engine, recessed linear wall grazer with flangless housing, nominal 2" (51mm) wide aperture and regressed acrylic lens. May be used as a wall grazer (3U) or a general down light (4U). Used in low ceiling heights to highlight the texture in surfaces such as stucco or brick, illuminate flat surfaces such as venetian plaster, fabric or wood, or specular surfaces such as polished stone or stainless steel.

**JOB:** \_\_\_\_\_  
**SPECIFIER:** \_\_\_\_\_  
**TYPE:** \_\_\_\_\_  
**QUANTITY:** \_\_\_\_\_  
**SIGNATURE:** \_\_\_\_\_

**SPECIFICATIONS**

**HOUSING**

- Extruded aluminum housing with utrim plaster frame
- ≈ Airtight construction suitable for direct contact with insulation

**MOUNTING**

- Recessed in sheetrock ceiling

**ELECTRICAL**

- Integral dimmable electronic driver with internal short circuit protection

**LAMP**

- 2 watt LED supplied with fixture

**SOCKET**

- Circuit board mounted to extruded aluminum heatsink
- Inline connectors allow removal and replacement

**LENS**

- Acrylic diffusing lens. Others available consult factory


**TRIM**







- Lens frame integral to housing
- ST is flanged trim fully sealed and gasketed. Aperture lens required

**FINISH**

- Powder paint on all surfaces in black and white as standard
- Additional colors and RAL palette available
- Custom finishes available

**LABELS**

-  US tested to UL standards 1598, Damp location, Wet with ST trim, IC/Airtight, Title 24

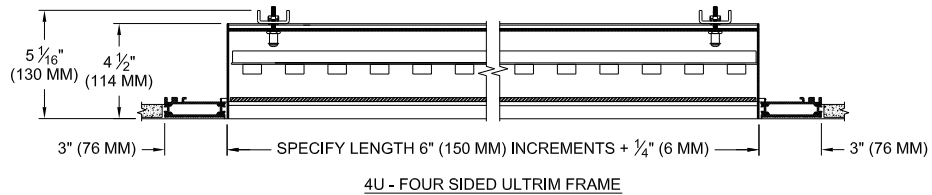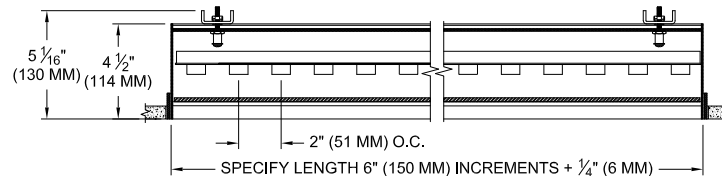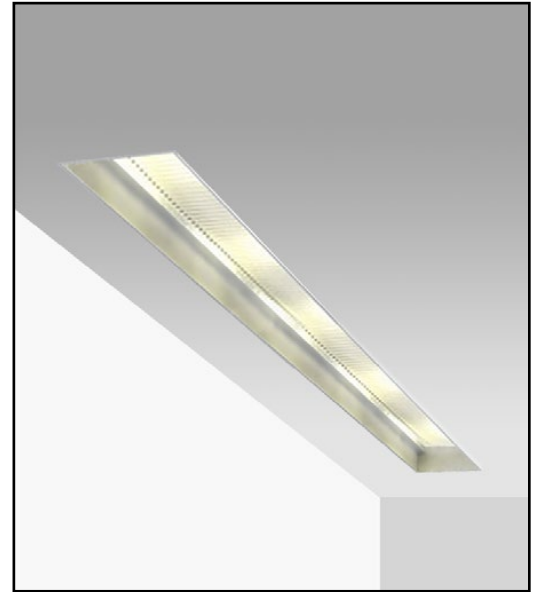

REFLECTED PLAN VIEW

**ORDERING INFORMATION**

805-LED-APH	LENGTH	DRIVER	FINISH	APERTURE LENS	ACCESSORIES
Airtight Plaster Housing 8 = 80 CRI 27 = 2700K 9 = 90+CRI 30 = 3000K 35 = 3500K	Specify exact length in increments of 12" (300 mm) Min. 2' required for integral driver	UN2 =120v-277v, 0-10v Dim. 9W/ft 1100lm/ft (nom.) UN3 =120v-277v, 0-10v Dim. 9W/ft 600lm/ft (nom.) UN5 =120v-277v, 0-10v Dim. 12W/ft 700lm/ft (nom.) 122LT2 =120v, Lutron 2 wire 9W/ft 1100lm/ft (nom.) 122LT3 =120v, Lutron 3 wire 9W/ft 1100lm/ft n(nom.) 123LT2 =120v, Lutron 2 wire 9W/ft 600lm/ft (nom.) 123LT3 =120v, Lutron 3 wire 9W/ft 600lm/ft (nom.) 125LT2 =120v, Lutron 2 wire 12W/ft 700lm/ft (nom.) 125LT3 =120v, Lutron 3 wire 12W/ft 700lm/ft (nom.)	WHT = White BLK=Black PXX = SLI Color XXXX = RAL # CST = Custom	79A = Veiling Acrylic 91A = Solite	ST = Shower Trim* LC = Lens Clip 3U = 3 Side Ultrim 4U = 4 Side Ultrim *Aperture lens required



Patent Pending.  
 These specifications subject to change without notice.

[www.specialtylightingindustries.com](http://www.specialtylightingindustries.com)  
 1306 Doris Avenue, Ocean, NJ 07712 USA  
 800.462.7812 732.517.0800 FAX:732.517.0971