

Fluorescent recessed linear slot for wall grazing or general lighting. Nominal 2" wide aperture and regressed acrylic lens.

TYPE: \_\_\_\_\_

JOB: \_\_\_\_\_

SPECIFIER: \_\_\_\_\_

**SPECIFICATIONS**

**HOUSING** - Extruded aluminum housing with integral flange.

**SOCKET** - Semi-specular low iridescence aluminum reflector. G5 socket with rotor for secure lamp retention.

**MOUNTING** - Recessed in architectural ceiling.

**LENS** - Borosilicate glass or acrylic diffusing lens.

**ELECTRICAL** - Integral electronic ballast.

**TRIM** - Overlap flange integral to housing.


**LAMP** - T5 Fluorescent lamp supplied by others.

**FINISH** - Powder paint on all surfaces in black and white as standard. 14 additional colors and RAL palette available. Consult factory for custom finishes.

**LABELS** - UL, C-UL, Damp location

**APPLICATIONS**

Narrow profile slot used in medium ceiling heights to provide general illumination or to highlight textured or specular wall surfaces.

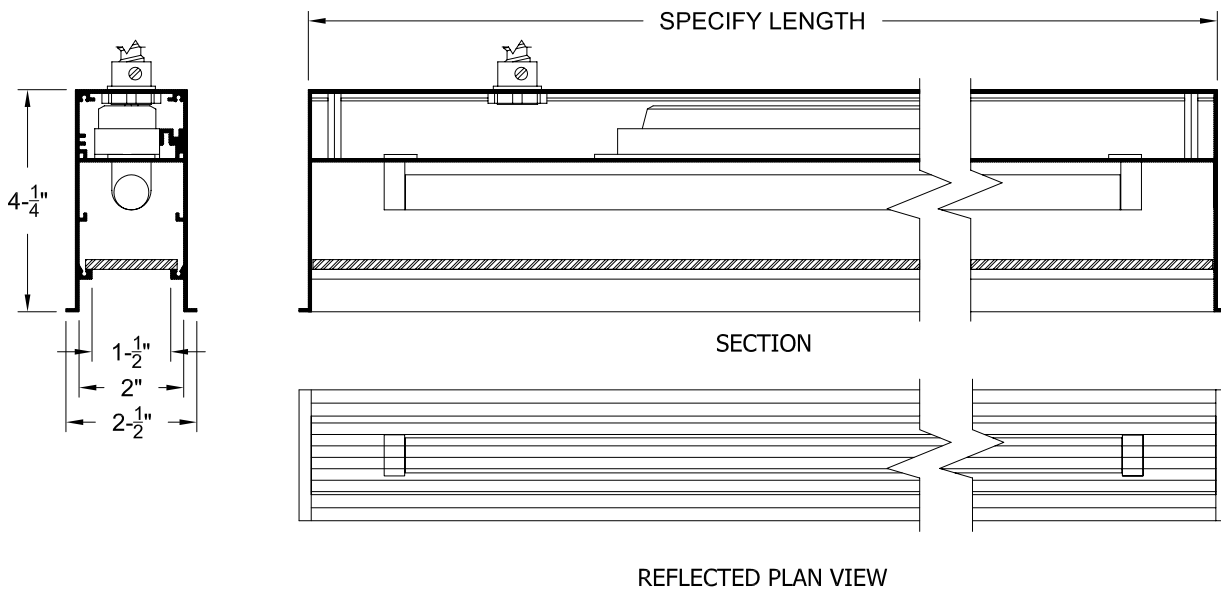

**ORDERING INFORMATION**

HOUSING	LAMP		LENGTH	BALLAST	FINISH	LENS
805-T5-FH						
Flanged housing	Qty	Wattage	Specify exact length	120 220 240 277	WHT = White BLK = Black PXX = SLI Color XXXX = RAL # CST = Custom	84 = Supertex Acrylic 85 = Prismatic Acrylic 89 = White Acrylic 91 = Solite 93 = Sandblasted
	1	14 24HO				
	2	21 39HO				
	3	28 54HO				
	4	35 80HO				

This information is provided as a specification aid. A submittal will be prepared by the manufacturer for approval prior to fabricating this product.



**SPECIALTY LIGHTING INDUSTRIES, INC.**

NOTE: These specifications subject to change without notice.

[www.specialtylightingindustries.com](http://www.specialtylightingindustries.com)

1306 DORIS AVENUE, OCEAN, NJ 07712 USA 800.462.7812 732.517.0800 FAX 732.517.0971 © 02/08