

TYPE: \_\_\_\_\_

JOB: \_\_\_\_\_

SPECIFICATIONS

**HOUSING** - Precision die-formed, heavy gauge CRS. Welded end plates, no visible seam.

**SOCKET** - PAR, medium base, porcelain, 600w, 250v.

**MOUNTING** - Recessed, for installation in GWB/plaster ceilings.

**LABELS** - UL, C-UL -Dry Location.

**LAMP** - PAR 38, 120v (spot recommended) - by others.



**LENS** - Supertex borosilicate glass. Others available consult factory.

**HOUSING FINISH** - Black powder paint on all recessed surfaces.

**BAFFLE FINISH** - RAL colors standard, consult factory for custom finishes.

APPLICATIONS

Large profile, recessed, designed to graze down walls and other flat surfaces by positioning the trim of the fixture housing near the surface to be illuminated.

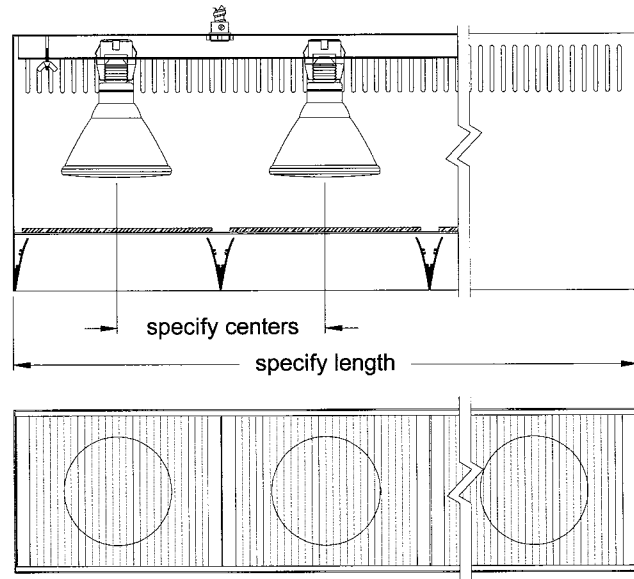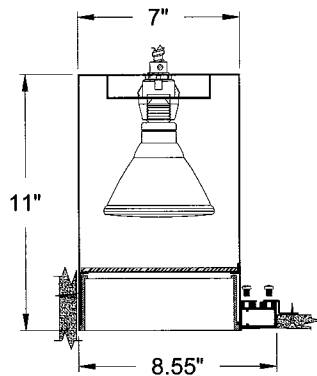

ORDERING INFORMATION

FIXTURE	LAMP CENTERS	LENGTH	BAFFLE FINISH
<b>#811-PAR38 PL</b>			
Recessed linear wall grazing system	<b>9 = 9"</b> <b>12 = 12"</b>	specify exact length	<b>WHT</b> = White <b>BLK</b> = Black <b>XXXX</b> = RAL # <b>CST</b> = Custom (must supply chip)



**SPECIALTY LIGHTING INDUSTRIES, INC.** ©2004

1306 DORIS AVENUE OCEAN, NJ 07712 800.462.7812 732.517.0800 FAX 732.517.0971 [www.specialtylightingindustries.com](http://www.specialtylightingindustries.com)

These specifications subject to change without notice.