

Multi-lamp, solid state light engine, in-ground deep baffle wall grazer, nominal 2" (50mm) wide aperture parabolic baffle and regressed acrylic lens. Narrow profile wall grazing upright used in wall heights up to 10 feet (3m) to highlight the texture in surfaces such as stucco or brick, illuminate flat surfaces such as fabric or wood, or specular surfaces such as polished stone or stainless steel.

SPECIFICATIONS

HOUSING

- Extruded aluminum housing with bolt on end plates

MOUNTING

- Recessed in floor

ELECTRICAL

- Integral dimmable electronic driver with internal short circuit protection.
- 120v-277v primary, compatible with 0-10v dimmers.
- Also available for 120v phase control. Consult factory for other drivers.

LAMP

- 2 watt LED 2" o.c. supplied with fixture

SOCKET

- Circuit board mounted to extruded aluminum heatsink
- Inline connectors allow removal and replacement

LENS

- Pyrex walkover lens for residential or commercial applications
- Acrylic diffusing lens

TRIM

- Parabolic louver baffle

FINISH

- Housing available in white as standard
- Louver available in black or white as standard
- Additional standard colors, RAL palette, custom finishes available

LABELS

-  , US tested to UL standards 1598, Damp location


JOB: _____

SPECIFIER: _____

TYPE: _____

QUANTITY: _____

SIGNATURE: _____

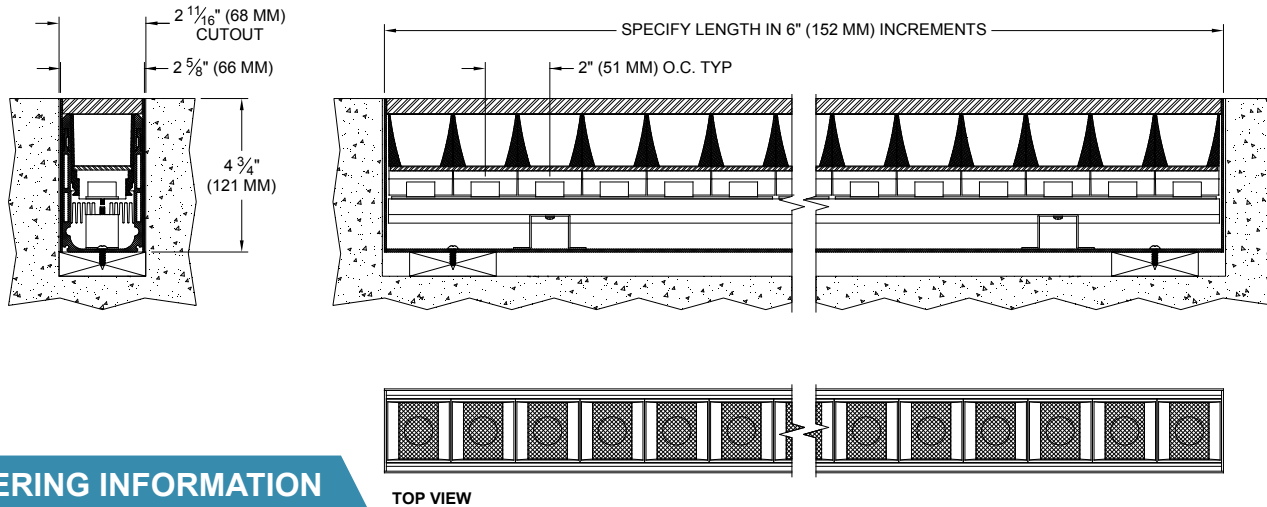

ORDERING INFORMATION

811DB-LED-IH	LENGTH	DRIVER	HOUSING / LOUVER	APERTURE LENS	WALKOVER LENS
In-Ground Housing 8 = 80 CRI 27 = 2700K 30 = 3000K 35 = 3500K	Specify exact length in increments of 6" (150 mm) Minimum 2' for integral driver	UN3 = 120v-277v, 0-10v Dim. 9W/ft 600lm/ft (nom.) UN5 = 120v-277v, 0-10v Dim. 12W/ft 700lm/ft (nom.) 122LT2 = 120v, Lutron 2 wire 9W/ft 1100lm/ft (nom.) 122LT3 = 120v, Lutron 3 wire 9W/ft 1100lm/ft (nom.) 123LT2 = 120v, Lutron 2 wire 9W/ft 600lm/ft (nom.) 123LT3 = 120v, Lutron 3 wire 9W/ft 600lm/ft (nom.) 125LT2 = 120v, Lutron 2 wire 12W/ft 700lm/ft (nom.) 125LT3 = 120v, Lutron 3 wire 12W/ft 700lm/ft (nom.)	WHT = White BLK = Black PXX = SLI Color CST = Custom	P14 = White BLK = Black PXX = SLI Color CST = Custom	CP84 = Res Clear CP87 = Comm Clear SP84 = Res Frosted SP87 = Comm Frosted



Patent Pending.
These specifications subject to change without notice.

www.specialtylightingindustries.com
1306 Doris Avenue, Ocean, NJ 07712 USA
800.462.7812 732.517.0800 FAX: 732.517.0971