






Exposed Ceiling Joists. Connect all wiring for housing before ceiling installation.

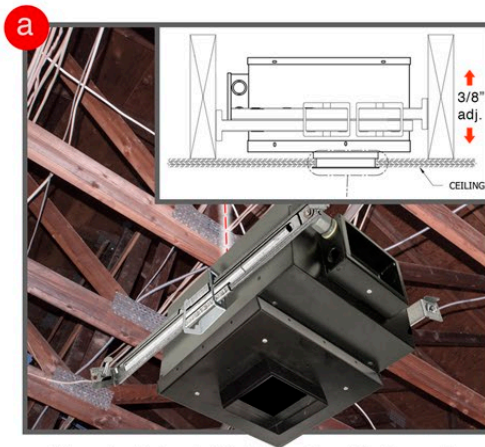


Step A- Adjustable Mounting Rails anchor housing to ceiling joists with screws. Housing can be adjusted vertically. *See Detail Above.*

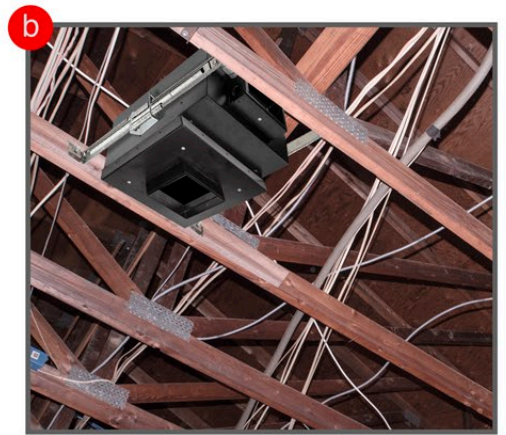


Step B- After vertical adjustments have been made, continue ceiling install.

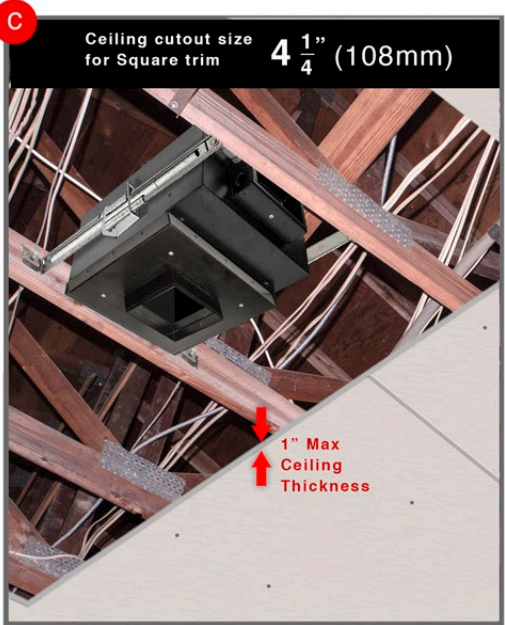

Step C- Finish base ceiling installation.

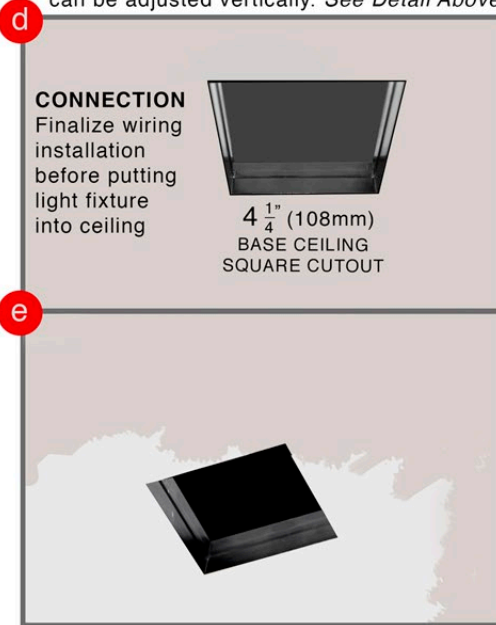


Step D- Install ceiling and cutout square opening to fit around housing throat.
Step E- Paint ceiling after GWB has been cut to fit around housing throat.

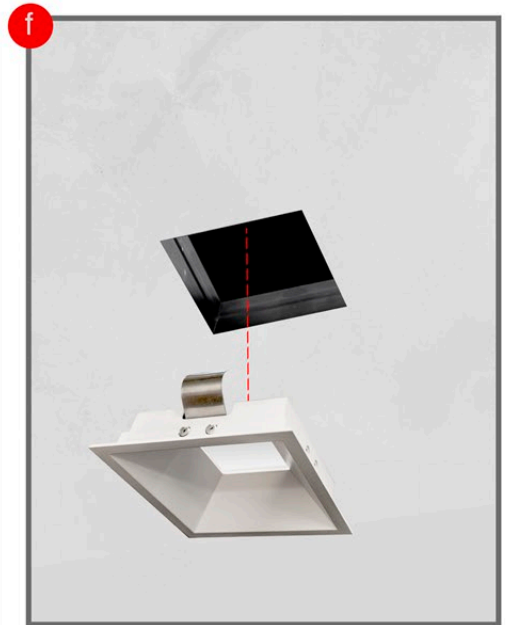


Step F- After paint has dried out, clip in flanged trim to finalize install.

Detail
inside view of flanged trim

Flanged Trim
uses 2 pressure clamps to anchor trim to housing

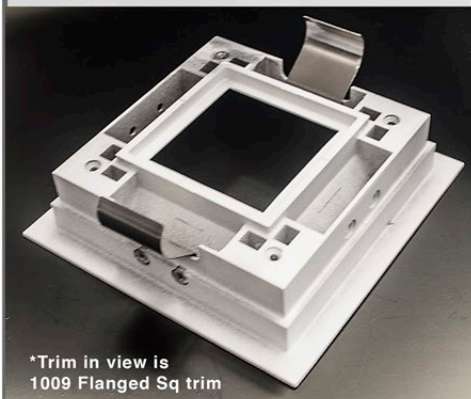

*Trim in view is 1009 Flanged Sq trim

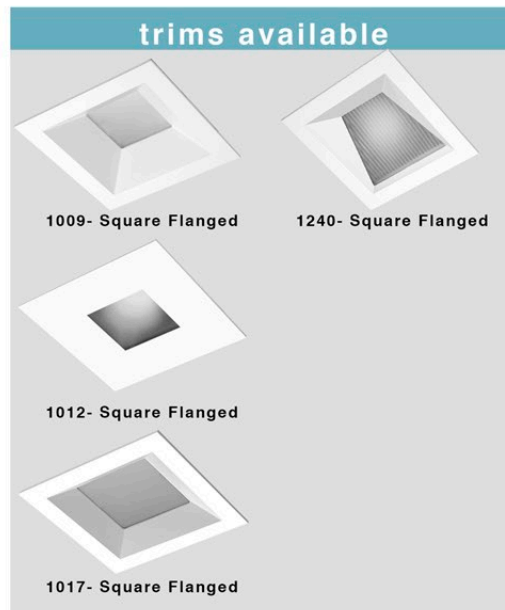

Instruction sheet for standard ceiling install (Flanged trim-UH)
1009, 1012, 1017, 1240



Final step is to make sure trim is locked with clamps on both sides