

Twin lamp, low-voltage halogen recessed wall washer with nominal 4"x8" rectangular 2 cell aperture and flangeless trim. Suitable for install from below applications.

TYPE: \_\_\_\_\_  
 JOB: \_\_\_\_\_  
 SPECIFIER: \_\_\_\_\_

**SPECIFICATIONS**

**HOUSING** - Precision die-formed heavy gauge aluminum with perforated flangeless trim and integrated screed edge.

**MOUNTING** - Install from below into sheetrock ceiling.

**ELECTRICAL** - "Integral dimmable electronic transformer. 120v primary lead, (220v, 240v, 277v available), 11.75v secondary with overload protection. External thermoprotector. Remote magnetic transformer available.

**LAMP** - (2) MR-16 Flood, 50w max. supplied by others.

**LABELS** - CSA-C,US, Damp location.

**SOCKET** - Precision die formed aluminum socket plate. G4/G6 ceramic socket with high temperature, teflon coated lead wires.


**LENS** - Supertex borosilicate spread lens, hinged for relamping.

**TRIM** - Flangeless, two piece die-cast aluminum pyramidal shield. .

**FINISH** - White powder paint housing. Aperture trim available in black white or RAL colors as standard. Consult factory for custom finishes.

**APPLICATIONS**

Wallwashing in low to medium ceiling heights typically found in residential, commercial and retail applications. Suitable for new or existing construction with limited recessing depth.

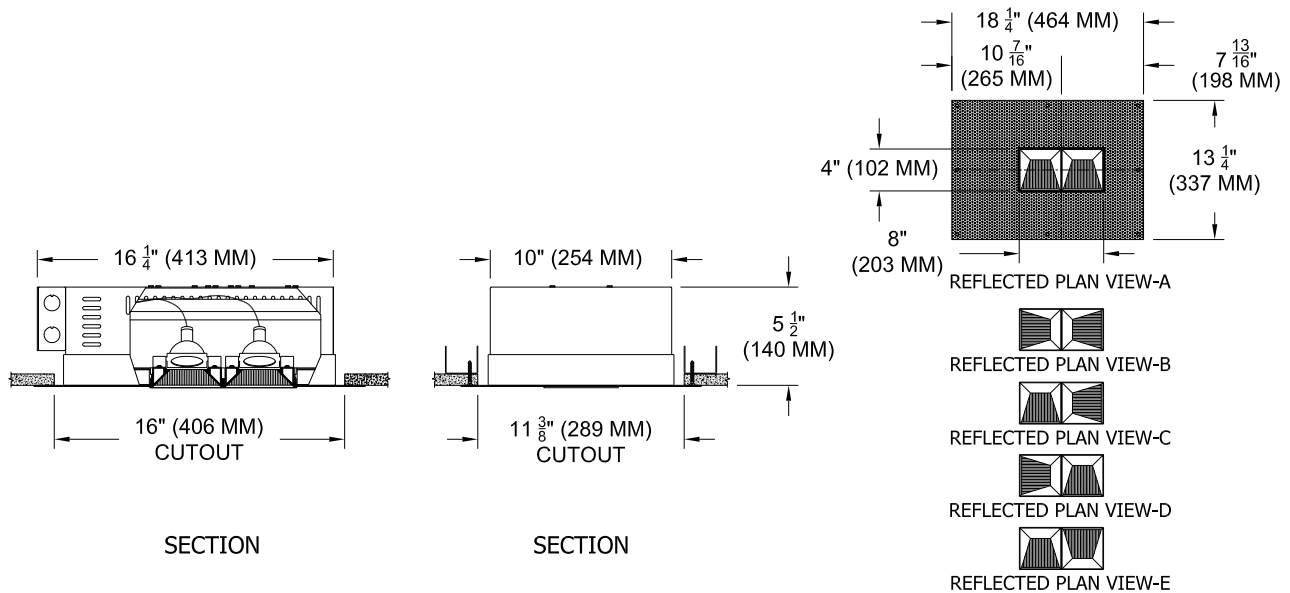

**ORDERING INFORMATION**

HOUSING	TRIM	TRANSFORMER	FINISH	APERTURE LENS
1240WW_-2MR16-SPH	ZT	/		82A
Shallow Plaster Housing WWA = Double WWB = Opposite WWC = Left WWD = Right WWE = Cross	ZT = Flangless trim	EX = Electronic 120 EX2=2 Cir. 220 Electronic 240 RX = Remote 277 TX = Magnetic	P14 = White PXX = SLI Color WXX = Wood XXXX = RAL # CST = Custom	82A = Supertex



**SPECIALTY LIGHTING INDUSTRIES, INC.**

NOTE: These specifications subject to change without notice.

[www.specialtylightingindustries.com](http://www.specialtylightingindustries.com)

1306 DORIS AVENUE, OCEAN, NJ 07712 USA 800.462.7812 732.517.0800 FAX 732.517.0971