

# FLEX-CYLINDER ADJUSTABLE DOWNLIGHT

■ 1018 LED

Single lamp, solid state light engine, surface mounted nominal 4" (50mm) adjustable down light. Multiple options with head cylinder capable of 360° rotation.

SPECIFICATIONS

## HOUSING

- Precision die-formed heavy gauge aluminum

## MOUNTING

- Surface mount

## ELECTRICAL

- Integral electronic driver with internal short circuit protection



## LAMP

- LED supplied with fixture

## SOCKET

- Precision aluminum machined lampholder assembly

## LENS

- Interchangeable reflector provides multiple beam patterns
- Optional borosilicate lenses available for aperture

## TRIM

- Anodized aluminum reflector cone

## FINISH


- Available in black, white, or aluminum as standard
- Additional colors and RAL palette available
- Consult factory for custom finishes

## LABELS

-  , US tested to UL standards 1598, Damp location



**1018 LED**

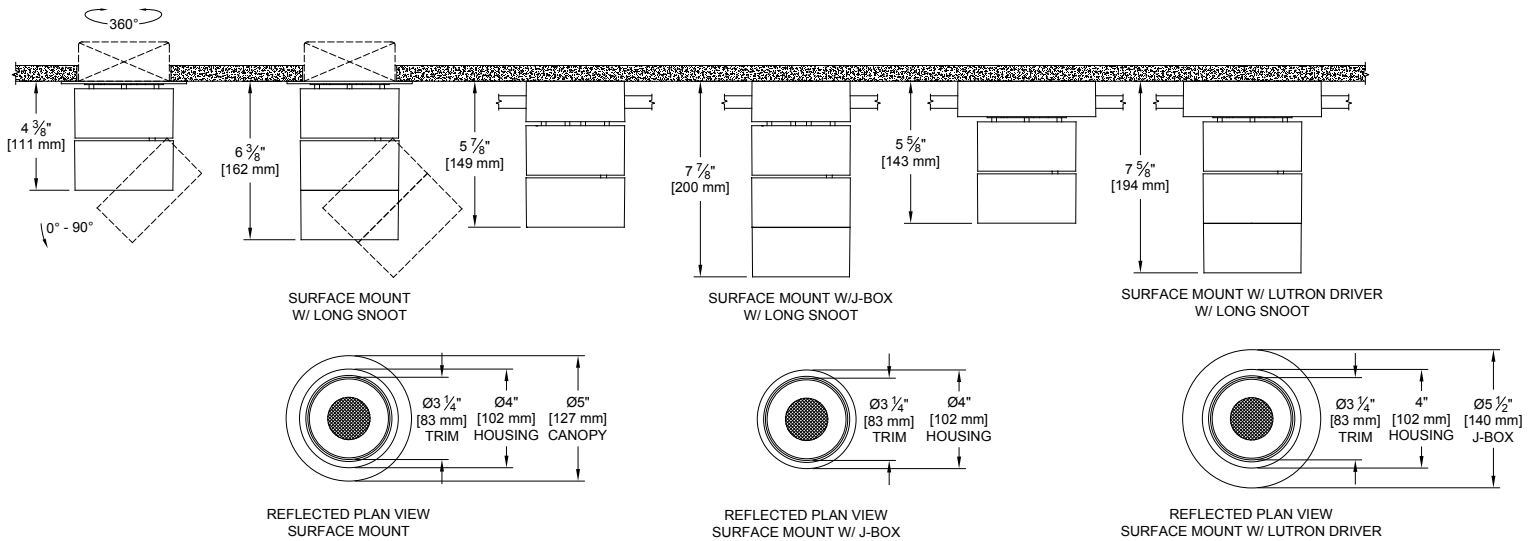

**ORDERING INFORMATION**

1018-LED-SH	DRIVER	BEAMSPREAD	TRIM FINISH	HOUSING FINISH	APERTURE LENS	ACCESSORIES
	/					
<b>9</b> = 90CRI <b>27</b> =2700K <b>30</b> =3000K <b>35</b> =3500K <b>40</b> =4000K  <b>AD</b> = Ambient Dim Max 3000K-1900K	<b>CZ14</b> =120-277v, 14W 1100lm <b>AD14</b> =350ma, 14.5W,1000lm  <b>S1</b> =0-10V dimming, 1%, 120-277v <b>T1</b> =TRIAC/ELV 2-wire, 3% 120v (Lead/Trail Edge) <b>E1</b> =EldoLED 0-10V Logarithmic Dim, 0.1%, 120-277v <b>E2</b> =EldoLED DALI, 0.1%, 120-277v <b>E3</b> =EldoLED 0-10V Linear Dim, 0.1%, 120-277v <b>L2</b> =Ltrn Hi-lume 1% 2-wr LED driver (120v fwd phase) <b>L3</b> =Lutron Hi-lume 1% 3-wire/EcoSystem, 120-277v <b>L5</b> =Ltrn 5-Series EcoSystem LED driver, 5%, 120-277v <b>LTB</b> =Lutron Hi-lume 1% EcoSys LED driver, 1%, 120-277v, Soft-on, Fade-to-Black	<b>10</b> = 10 Degrees <b>20</b> = 20 Degrees <b>30</b> = 30 Degrees	<b>P14</b> = White <b>BLK</b> = Black <b>PXX</b> = SLI Color <b>CST</b> = Custom <b>ANA</b> = Aluminum	<b>P14</b> = White <b>BLK</b> = Black <b>PXX</b> = SLI Color <b>CST</b> = Custom <b>ANA</b> = Aluminum	<b>Blank</b> = None <b>90A</b> = Clear <b>91A</b> = Solite <b>92A</b> = Supertex <b>93A</b> = Frosted	<b>JB</b> = Junction Box <b>LS</b> = Long Snoot

