


1. Attach supplied hanging bars to frame-in kit.
2. Position frame-in kit over hole in ceiling.
3. Attach hanger bars to ceiling supports, tees, or structural grid as required.
4. Drop flexible conduit through frame-in kit and attach to fixture housing.
5. Make electrical connections.
6. Insert housing into frame-in kit and fasten with supplied screws.
7. Lamp fixture.

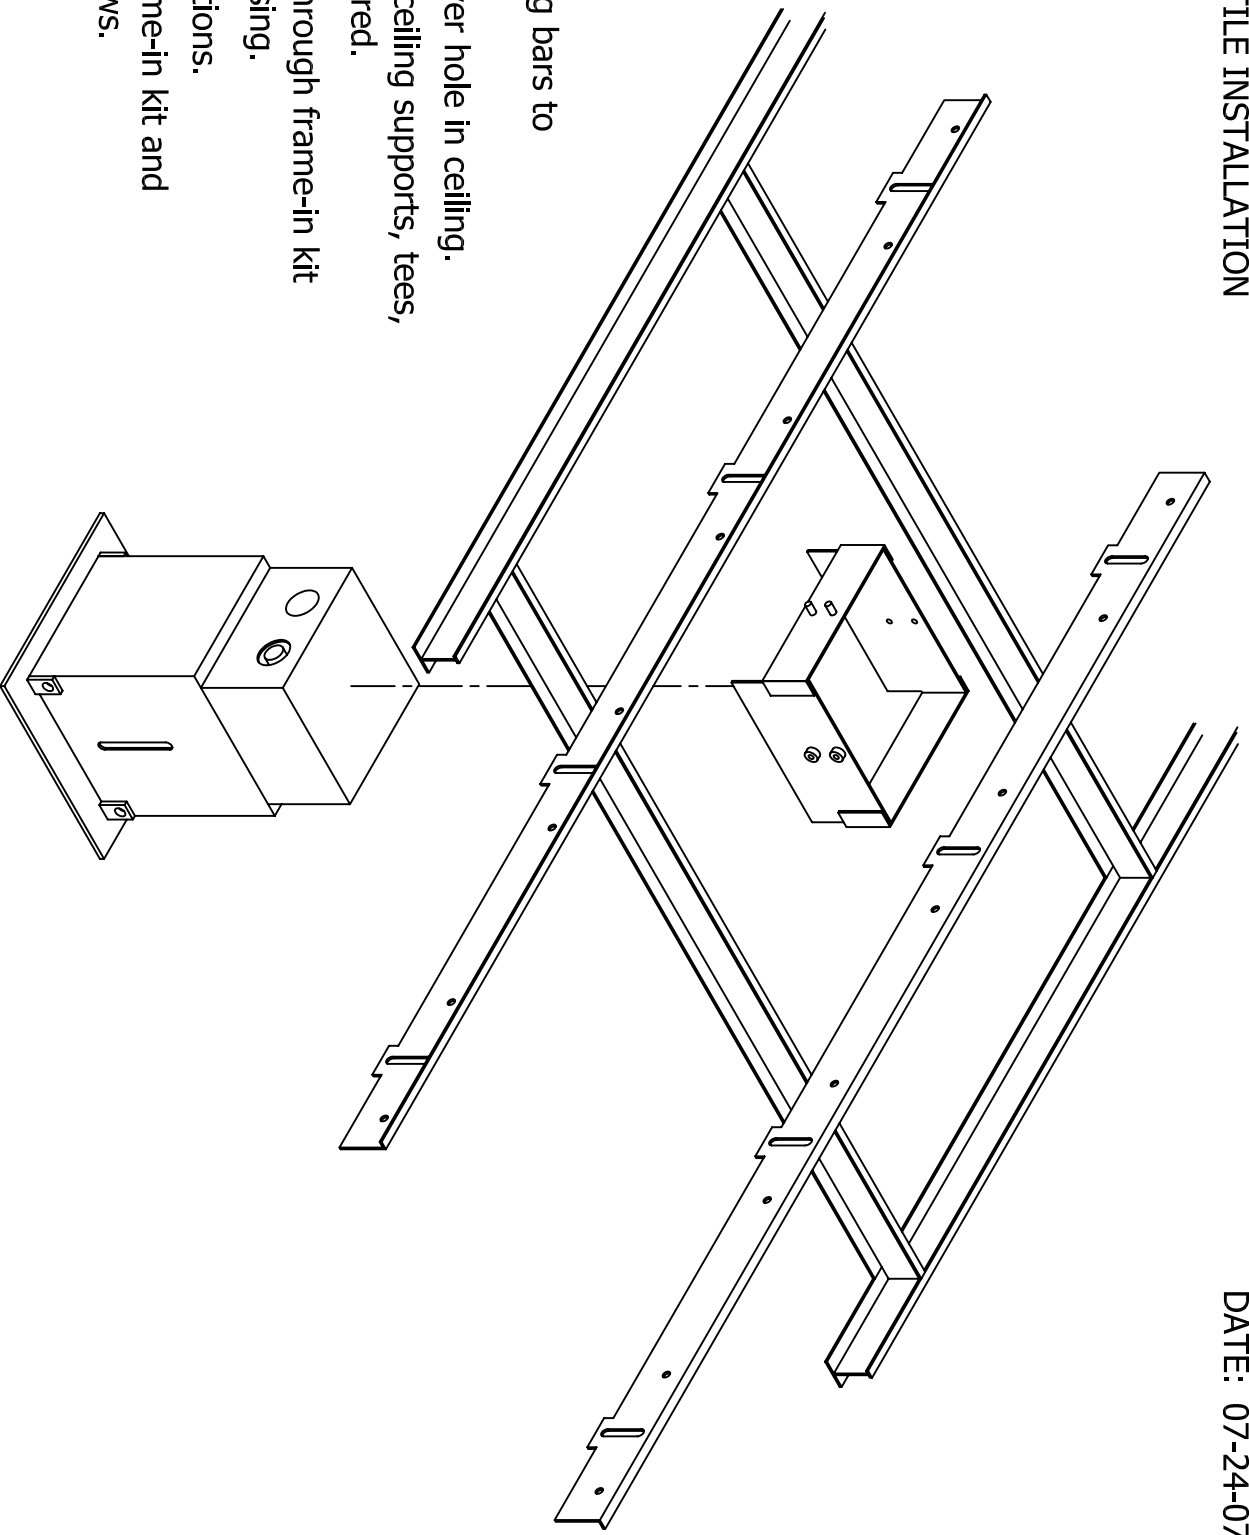

SPECIALTY LIGHTING
INDUSTRIES, INC.

1306 DORIS AVENUE, OCEAN, NJ 07712 USA

800.462.7812

732.517.0800

www.specialtylightingindustries.com

FAX 732.517.0971