

SPECIFICATIONS

HOUSING - Heavy gauge extruded aluminum (material of corrosion resistant alloy.) Welded aluminum end plate, no visible seam.

ELECTRICAL - MR-16, remote transformer required, sold separately. Maximum 74 watts per foot.

SOCKET - Precision die formed aluminum socket plate. G-4/G-6 with 250°C 600v Teflon coated lead wires.

MOUNTING - Surface, provide proper support.

TYPE: _____

JOB: _____

LABELS - UL, C-UL -Dry Location.


LAMP - MR-16, 12v (narrow spot recommended) - by others.

LENS - Supertex borosilicate glass. Others available consult factory.

FINISH - Powder paint on all surfaces. RAL colors standard, consult factory for custom finishes.

APPLICATIONS

Medium profile, surface mounted. Designed to graze down walls and other flat surfaces. Adjustable angle socket plate. Intended to highlight surface texture in brick, stone, stucco, tile, textured paint, fabric and wood panels.

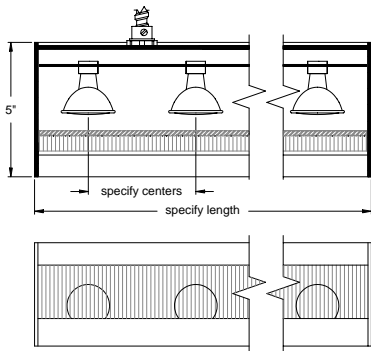

ORDERING INFORMATION

FIXTURE	LAMP	LENGTH	FINISH
#814			
Surface mounted wall grazing system	20MR-16 = 12v, 20w 37MR-16 = 12v, 37w (maximum 74w per foot)	specify exact length	WHT = White BLK = Black XXXX = RAL # CST = Custom (must supply chip)



SPECIALTY LIGHTING
INDUSTRIES, INC.

www.specialtylightingindustries.com

1306 DORIS AVENUE, OCEAN, NJ 07712 USA

800.462.7812 732.517.0800 FAX 732.517.0971